

Chinese Miracle Language Pack Editor for Infinity Box

User manual


TABLE OF CONTENTS

CHINESE MIRACLE LANGUAGE PACK EDITOR OVERVIEW.....	2
1. ANALYZE FULLFLASH-USE THIS TAB TO START.....	2
2. EDIT LANGUAGE PACK-USE THIS TAB TO EDIT OR TRANSLATE LANGUAGE PACK	3
3. DICTIONARY EDITOR	5
4. FONTS –FONT’S EDITOR	7
SELECT FONT WINDOW	7
FONT SYMBOL EDITOR WINDOW-CHANGE ALL/SELECTED SYMBOLS TAB	9
FONT SYMBOL EDITOR –EDIT CURRENT SYMBOL TAB.....	10
FONT SYMBOL EDITOR WINDOW- ADD NEW SYMBOLS TAB	11
5. KEYBOARD INPUT –DEFINE PHONES KEYBOARD INPUT CHARACTERS.....	13
6. INFO PAGE.....	14
7. SETTINGS- MAIN AND ADVANCED LANGUAGE PACK EDITOR SETTINGS.....	15
8. PICTURES.....	16
STEP BY STEP INSTRUCTIONS HOW TO CHANGE FONTS, CHANGE AND EDIT LANGUAGES IN FULLFLASH WITH SAMPLES.....	18
PART 1-WORKING WITH FONTS.....	19
PART 2-CHANGING KAYBOARD LAYOUT 1 FOR RUSSIAN LANGUAGE	26
PART 3-EDITING LANGUAGE PACKS	27

Chinese Miracle Language Pack editor overview.

1. Analyze fullflash-use this tab to start

Press **select** to open Your fullflash file

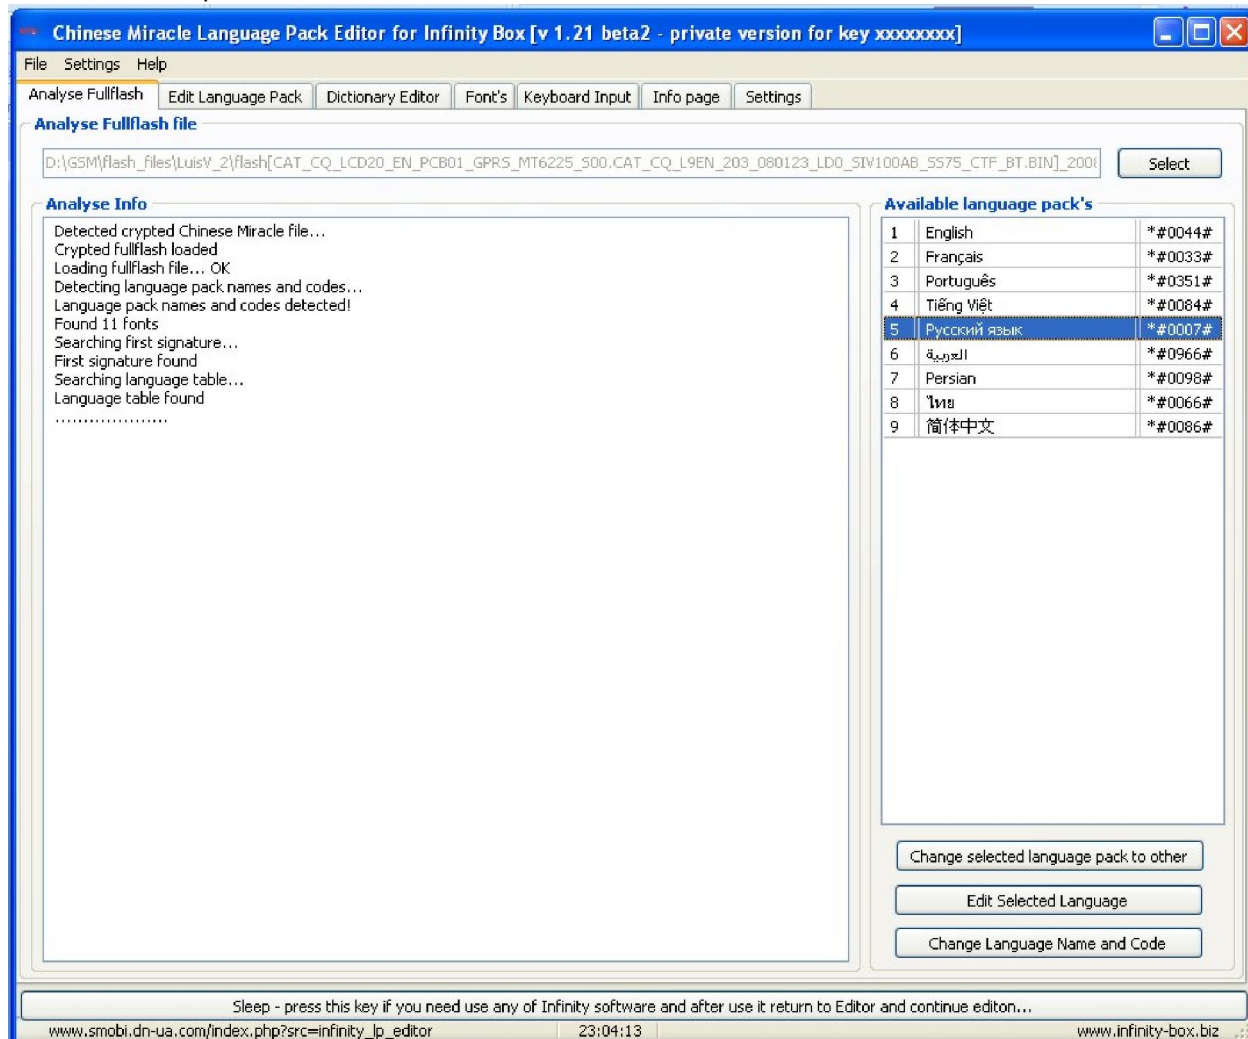


Choose one of available languages in fullflash and select this with mouse click

Available language pack's		
1	English	*#0044#
2	Français	*#0033#
3	Português	*#0351#
4	Tiếng Việt	*#0084#
5	Русский язык	*#0007#
6	العربية	*#0966#
7	Persian	*#0098#
8	ไทย	*#0066#
9	简体中文	*#0086#


Choose one of 3 language pack editing options

- 1) **Change selected language pack to other**-press this if You want to change one language completely to other
Selected language will automatically be deleted and set to default English language and ready for translation.
- 2) **Edit selected language** -press this option if you only want to edit and make some corrections in language. Many Chinese phones comes with bad translations with many mistakes-You have a great chance to correct this.

3) **Change language name and code**-use this option to change only language name and language code.

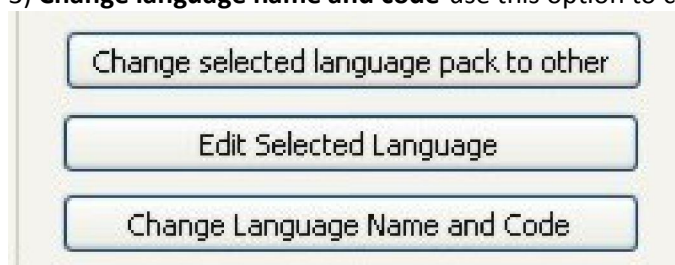

2. Edit language pack-use this tab to edit or translate language pack

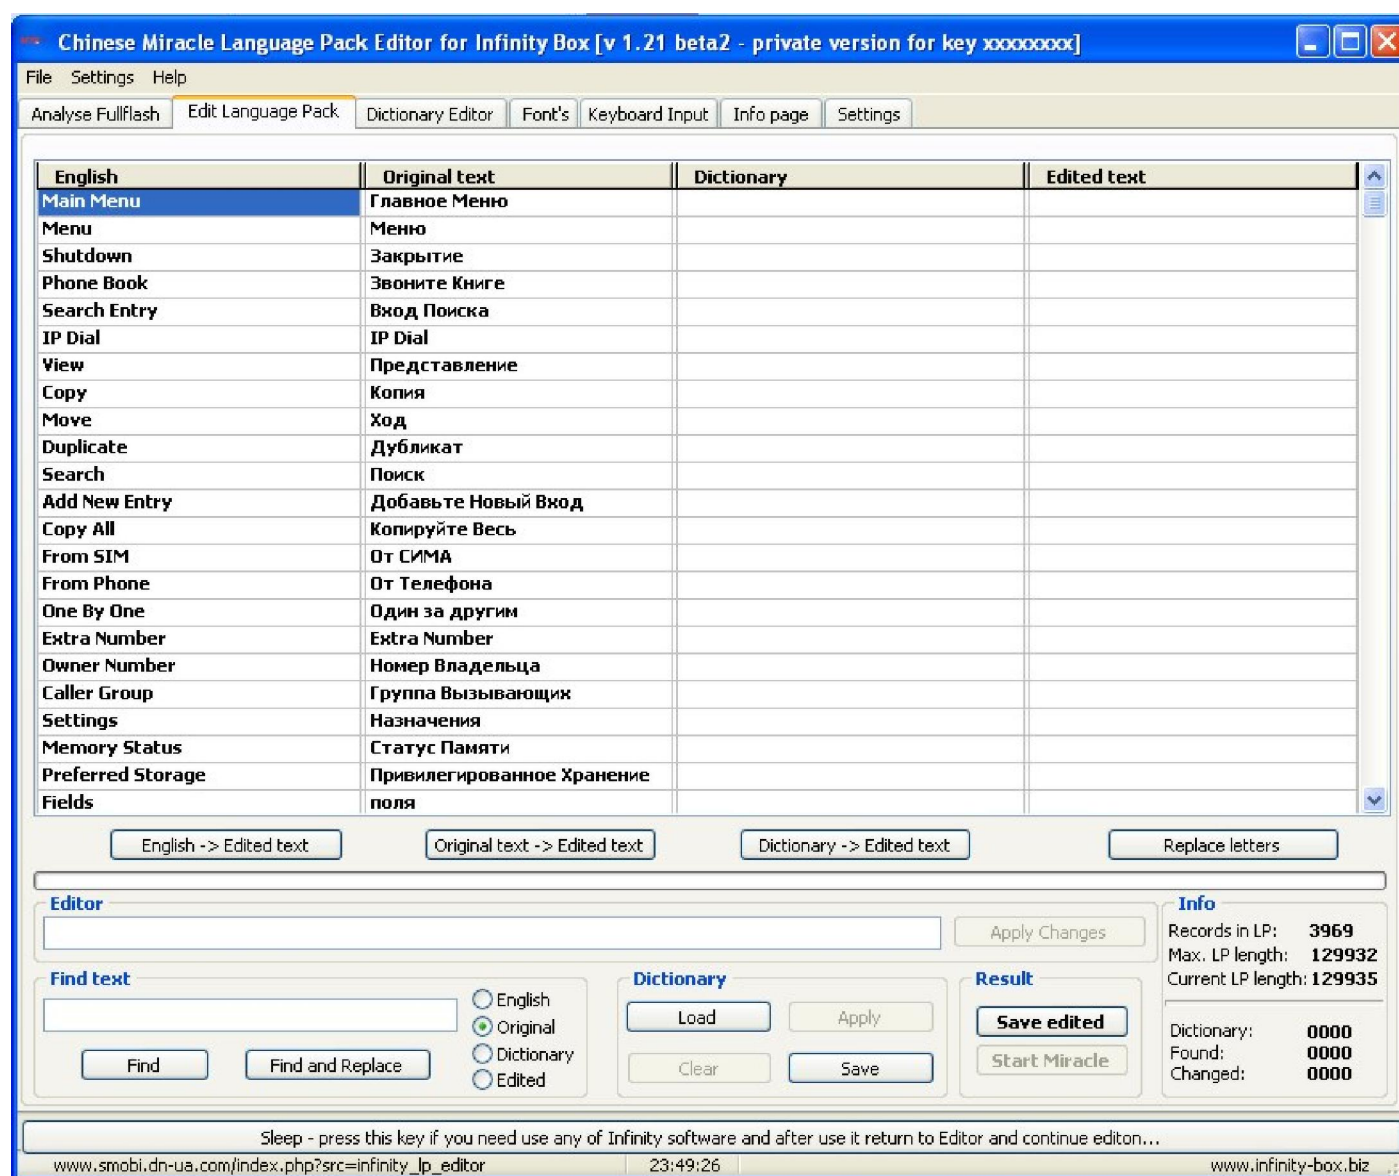

1) **Editor**-manually translate selected phrase, press **apply changes** or **ENTER** to take effect




See the result below

Menu	Меню		
Shutdown	Закрытие		
Phone Book	Звоните Книге		Телефонна якнига
Search Entry	Вход Поиска		
IP Dial	IP Dial		
View	Представление		

2) Find text-use to find any phrase or part of phrase in selected area

Find-press to simply find phrase or part of phrase

Find and replace-pres to find and replace phrase

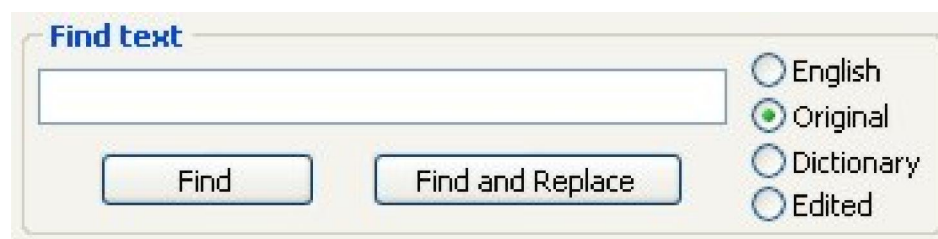

The 'Find text' dialog box contains a text input field at the top. Below it are two buttons: 'Find' and 'Find and Replace'. To the right of these buttons are four radio buttons labeled 'English', 'Original' (which is selected), 'Dictionary', and 'Edited'.

3) Dictionary



The 'Dictionary' dialog box contains four buttons arranged in a 2x2 grid: 'Load', 'Apply', 'Clear', and 'Save'.


Load-press to load already saved dictionary

Apply-press to apply dictionary in language pack

Save-press this to save edited dictionary or dictionary from original language pack for later use


Clear-press to clear currently loaded dictionary

4) Replace letters – use this command to replace one letter with other letter .All the chosen letters found in edited text will be replaced

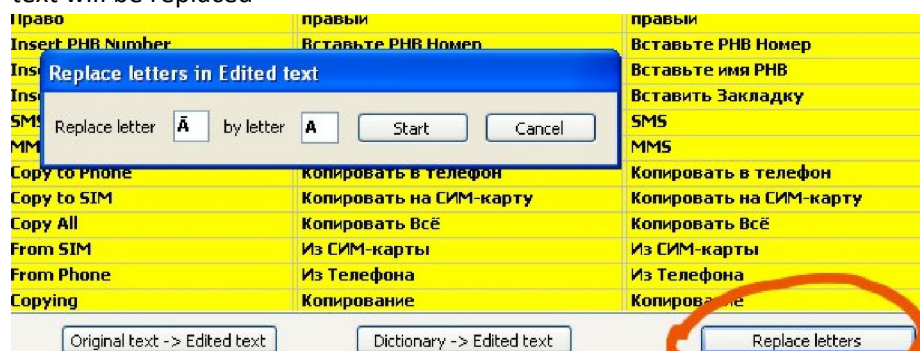

The 'Replace letters in Edited text' dialog box is overlaid on a background menu. The dialog has a title bar and contains the text 'Replace letter' followed by a text input field containing 'A', then 'by letter' followed by another text input field containing 'A'. There are 'Start' and 'Cancel' buttons. The background menu is a list of items with Russian and Chinese text, including 'Право', 'Insert PHB Number', 'Ins', 'SMS', 'MMS', 'Copy to Phone', 'Copy to SIM', 'Copy All', 'From SIM', 'From Phone', and 'Copying'. A red circle highlights the 'Replace letters' button at the bottom right of the dialog.

5) transfer selected phrases from English, original text or dictionary to Edited text



Three buttons are shown: 'English -> Edited text', 'Original text -> Edited text', and 'Dictionary -> Edited text'.

Or make selection of multiple phrases with right mouse click to transfer selected phrases to edited text

English	Original text	Dictionary	Edited text
Main Menu	Главное Меню		
Menu	Меню		
Shutdown	Закрытие		
Phone Book	Звоните Книге		
Search Entry	Вход Поиска		
IP Dial	IP Dial		
View	Представление		
Copy	Копия		
Move	Ход		
Duplicate	Дубликат		
Search	Поиск		
Add New Entry	Добавьте Новый Вход		
Copy All	Копируйте Весь		
From SIM	От СИМА		
From Phone	От Телефона		
One By One	Один за другим		
Extra Number	Extra Number		
Owner Number	Номер Владе		
Caller Group	Группа Вызв		
Settings	Назначения		
Memory Status	Статус Памяти		
Preferred Storage	Привилегированное Хранение		
Fields	поля		

English -> Edited text
Original text -> Edited text
Dictionary -> Edited text
Delete current selected fraze
Select current column

English -> Edited text Original text -> Edited text Dictionary -> Edited text Replace letters

6) Result

Save edited-press to save edited fullflash file

Start Miracle- press to start Chinese Miracle



7) Sleep-press this if you want to use other Infinity software and return later to language pack editor

Sleep - press this key if you need use any of Infinity software and after use it return to Editor and continue editon...		
www.smobi.dn-ua.com/index.php?src=infinity_lb_editor	0:55:05	www.infinity-bo

3. Dictionary editor

Use Dictionary tab to create new or edit current dictionary

Info
Records in Dictionary: 3 Deleted records: 1

Fraze pair

Dictionary

Load-open previously saved dictionary for editing

Clear-press to clear current dictionary and start new (Saved dictionary will not be deleted)

Find-use to find phrase or part of phrase in dictionary

Add empty record-add new empty record in new or current dictionary

Delete record-delete record from dictionary (record will be marked red and deleted after pressing **save**)

UnDelete record-undo previous operation

Save-save edited dictionary in file

Sort-sort records in alphabetical order


Sort and Remove duplicates-sort records and remove duplicate records. Use this tool to combine 2 or more dictionaries in one big dictionary.

To make your own big dictionary:

- 1) Press Load and open previously saved from other phone "dictionary1.dict"
- 2) Press Load and open previously saved from other phone "dictionary2.dict"
- 3) Press Load and open previously saved from other phone "dictionary3.dict" etc
- 4) Press Sort and Remove duplicates-duplicate records will be removed
- 5) Press Save –save dictionary with name like "my_big_dictionary.dict".

NOTE: "dictionary1.dict" is only a sample name of dictionary. It's recommended to save dictionaries with names like "Deutch_Anycool_T808.dict"

Dictionary editor window

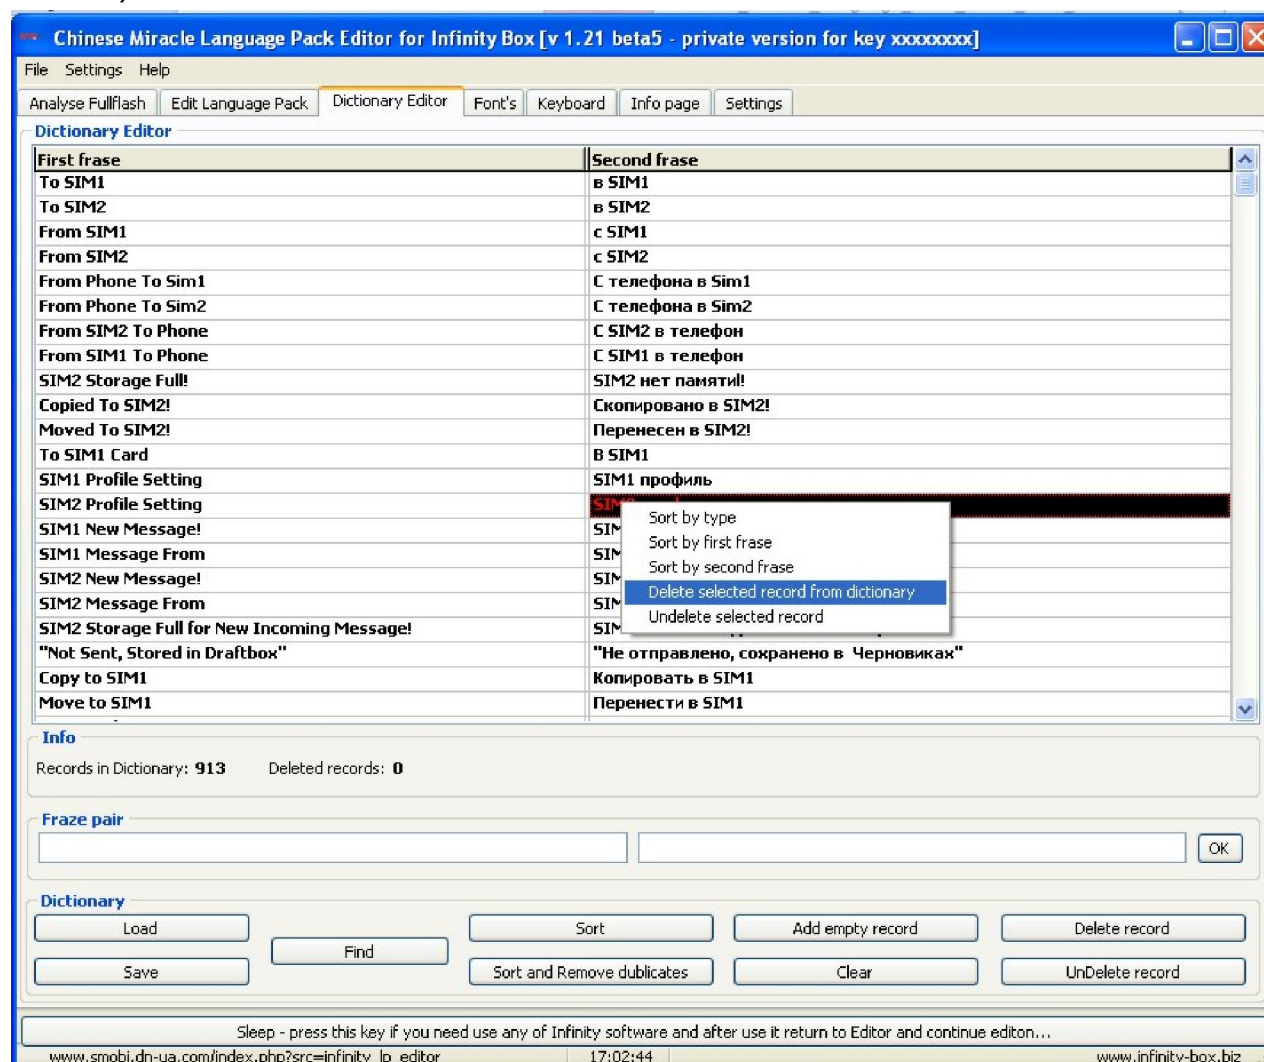

You can also sort and operate records in dictionary by selecting records with right mouse click

From Phone To Sim1	С телефона в Sim
From Phone To Sim2	С телефона в Sim
From SIM2 To Phone	С SIM2 в телеф
From SIM1 To Phone	С SIM1 в телеф
SIM2 Storage Full!	SIM2 нет памяти
Copied To SIM2!	Скопировано в S
Moved To SIM2!	Перенесен в SIM
To SIM1 Card	
SIM1 Profile Setting	рофиль
SIM2 Profile Setting	рофиль
SIM1 New Message!	овое сообщ
SIM1 Message From	общение
SIM2 New Message!	SIM2 Новое сообщ
SIM2 Message From	SIM2 сообщение

Sort by type
Sort by first frase
Sort by second frase
Delete selected record from dictionary
Undelete selected record


4. Fonts –font’s editor

Select font window



1. List of all fonts that are in current fullflash. Select which font you want to edit, if double click the font –**Font Symbol Editor** Tab will open.
2. **Selected font info** –shows font regions count and symbol count in region tables
3. **Font activity flags**–check to enable or disable current font usage in phone
4. **Edit symbols in selected font**–press this to edit symbols and **Font Symbol Editor** tab will open

5. Correct font height –press to edit font height

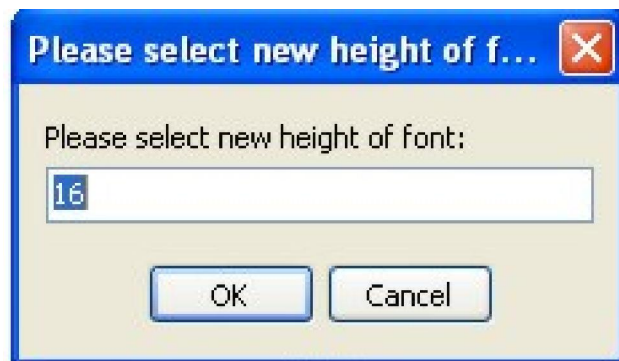

6. Delete selected font –deletes the selected font from phone


7. Deactivate all-deactivates all font activity flags

8. Activate all - activates all font activity flags


9. Undo changes-this will undo last unsaved operation

10. Apply changes to fullflash –press to apply changes to fullflash

Select font Tab

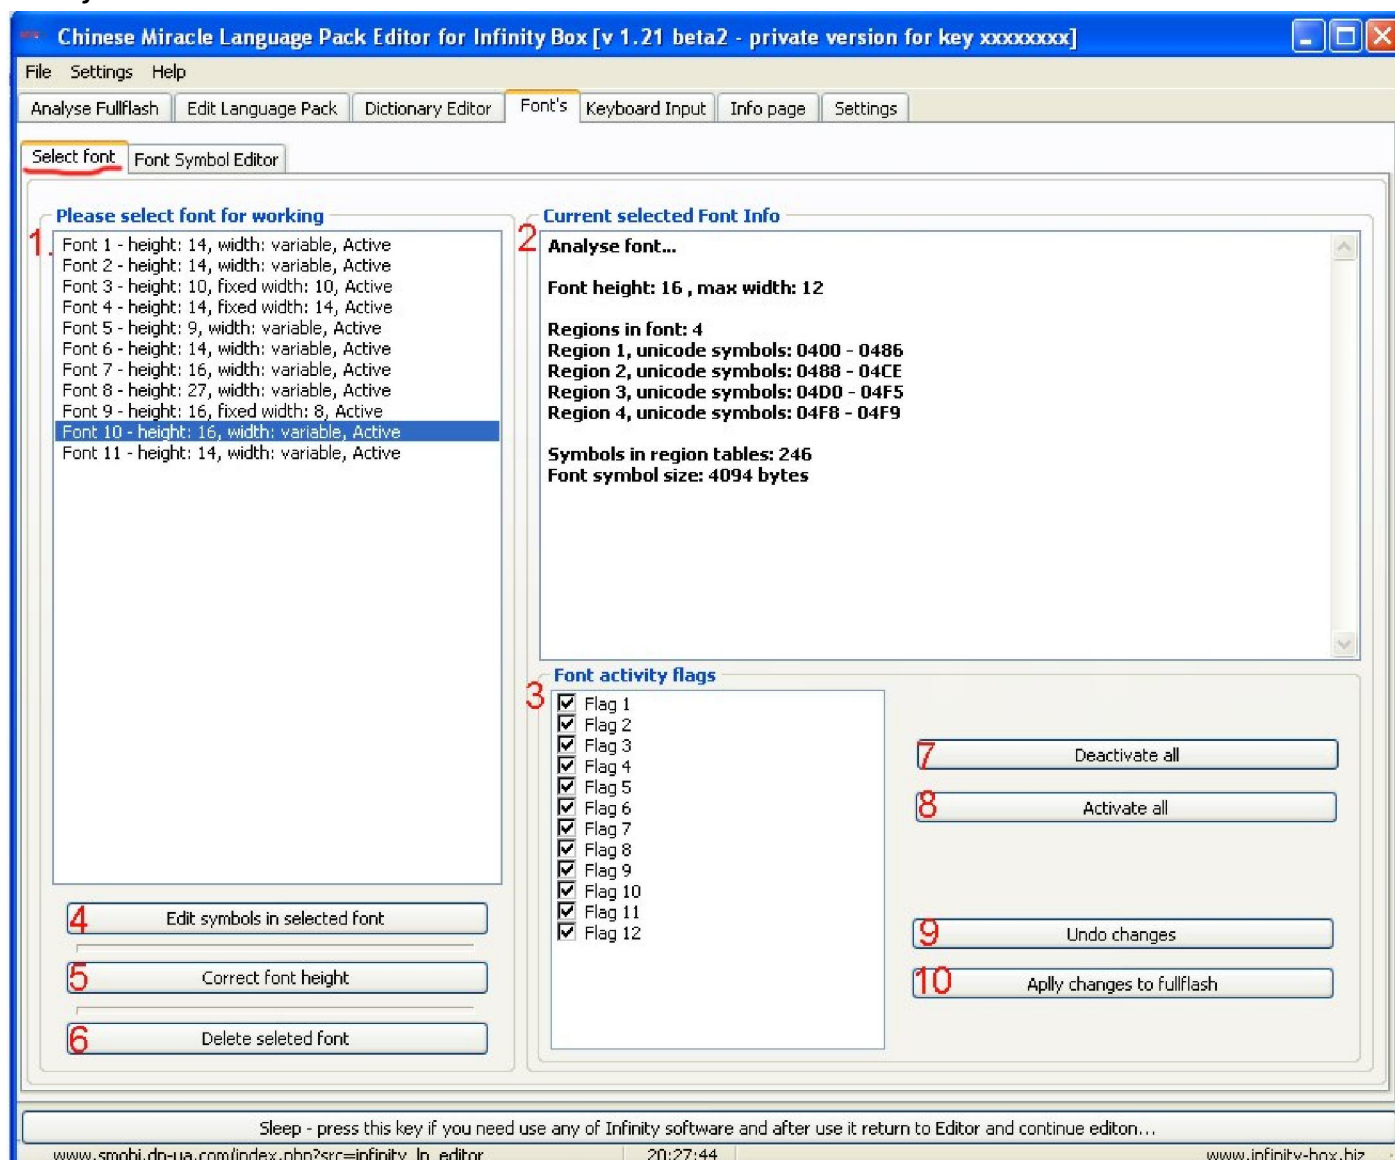


Font Symbol Editor window-change all/selected symbols Tab



1. **Current font**-List of all symbols in current font
2. Select symbol and double click it-you will see the symbol code, height and width


3. **Select font for selected/all font** –this will change all or selected symbols font. Choose symbol size, bold or italic.

By selecting symbol and with right mouse click you can set begin and end of selection, remove selection, undo changes, delete and undelete selected symbol or symbols from font

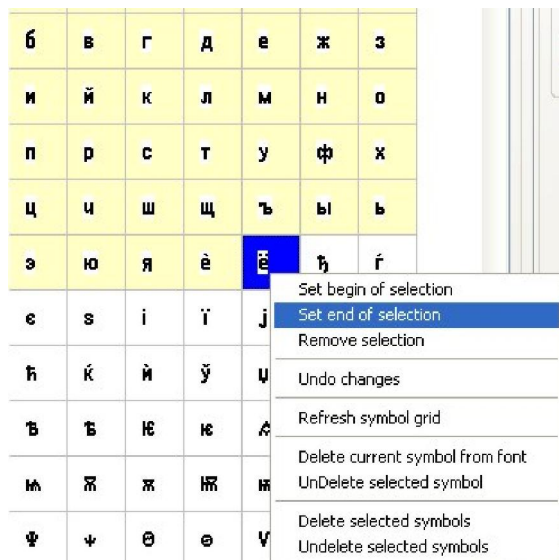

4. **Load symbols from file**-load previously saved symbols
Save symbols into file-save selected symbols to file for later use
5. **Save font into file**-save current font in file for later use
Load font from file-load previously saved font
6. **Apply all font changes into fullflash file**-apply changes you have made in fullflash
7. **Save edited fullflash file**-save your job.


Font Symbol Editor window

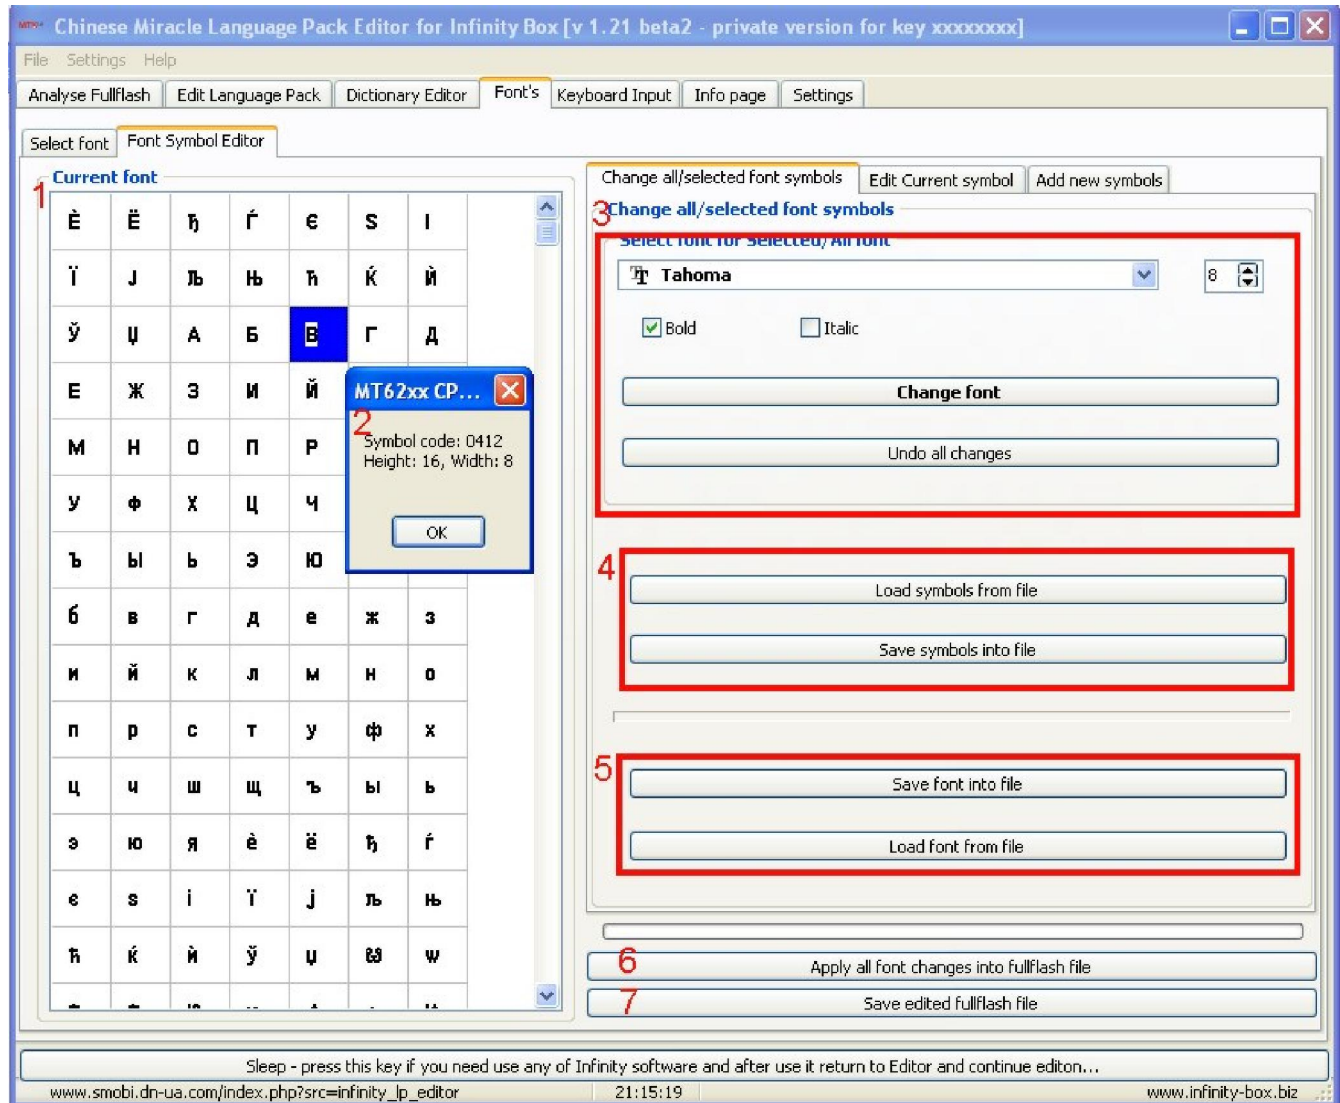

Font Symbol Editor -edit current symbol Tab

Use this sub window to work with single symbols-redraw, edit, modify etc

1. **Edit current symbol**-use left mouse click to redraw or draw selected symbol in squared net
- 2.,3-click arrows to move symbol to desired and correct position
4. Edit symbol height and width
5. **Select font for symbol**-change selected symbol font and size
6. **Apply all font changes into fullflash file**-apply changes you have made in fullflash
7. **Save edited fullflash file**-save your job.
8. Load/save symbol from/to file- load previously saved symbol and save current symbol to file for later use


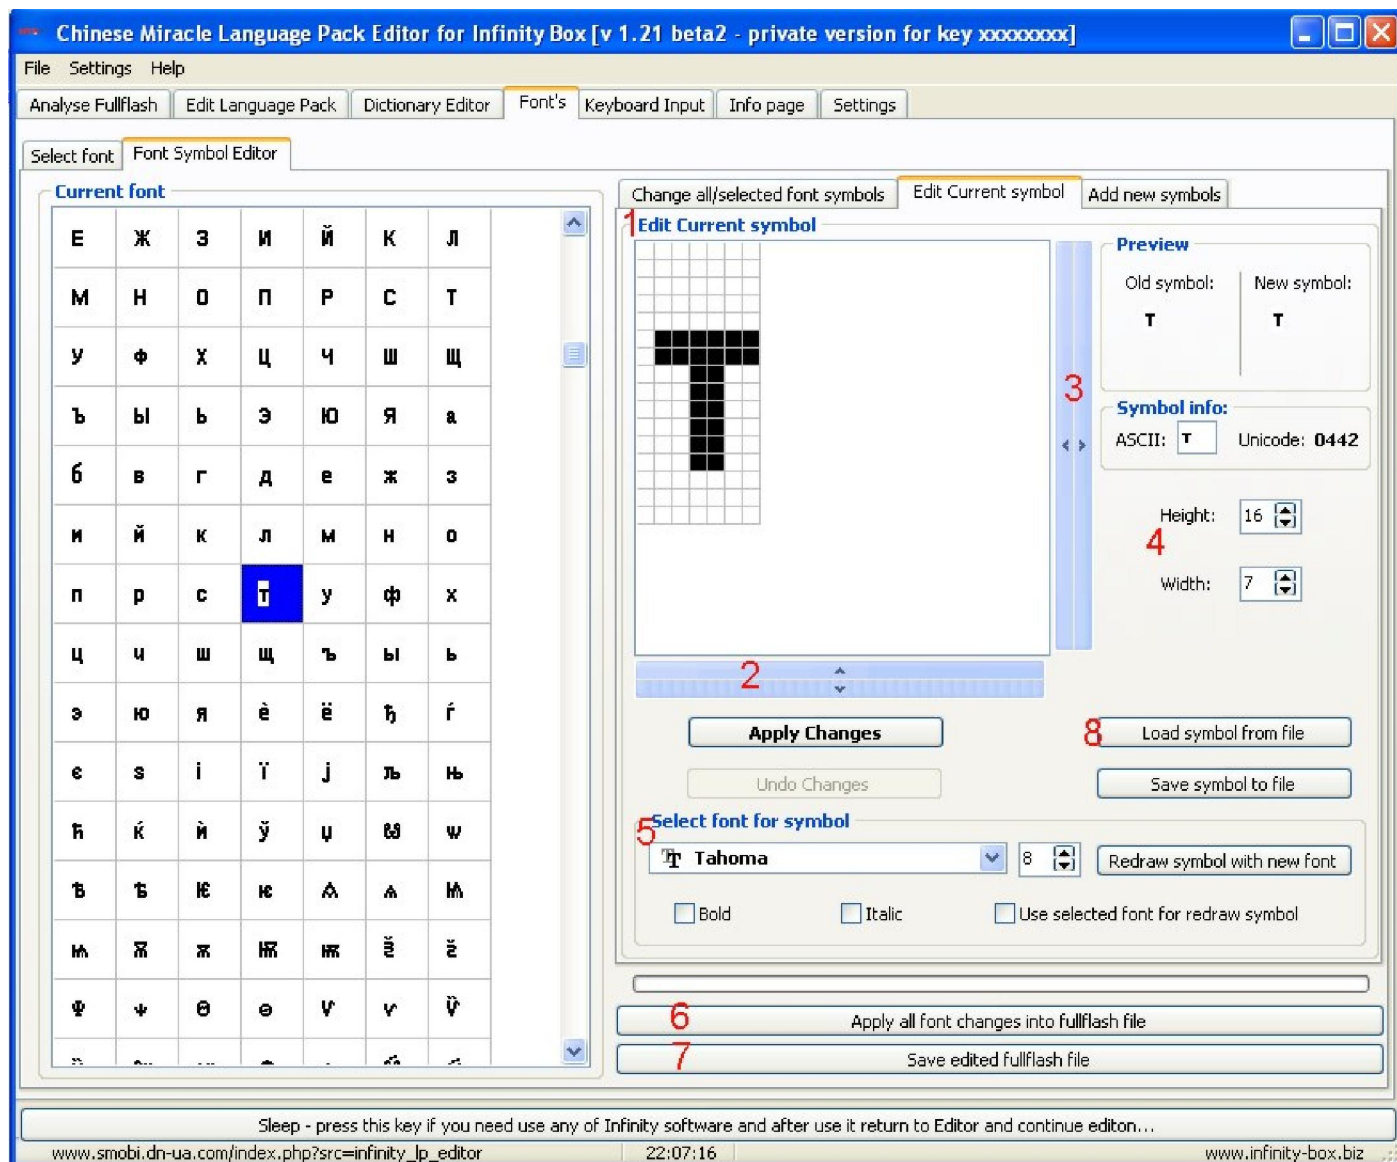


Font Symbol Editor window- Add new symbols Tab

Use this Tab for advanced font symbol adding in phone. You can add single symbols with known or unknown codes or add whole group of symbols in definite code interval. In picture below there are added group of russian symbols in code interval between 0410 to 044F with Tahoma font size 11. Unicode codes you can find by pressing **Code info** (4)


1. **Code**- fill in code number and press **Add new symbol with known Unicode code**. This will add a single symbol
2. **Symbol**-fill in a symbol from keyboard and press **Add new symbol with unknown Unicode code**. Entered symbol will be added
3. **Add symbols with code from: 0410 to: 044F** and press **Add symbols**-this will add a russian language symbols. Symbols for other languages you will find clicking **Code info** (4)

4. **Code info**- this will open Character map window. There you will find all the symbol codes needed for your language. Select character set and font for your language, click on symbol to see the symbol code.

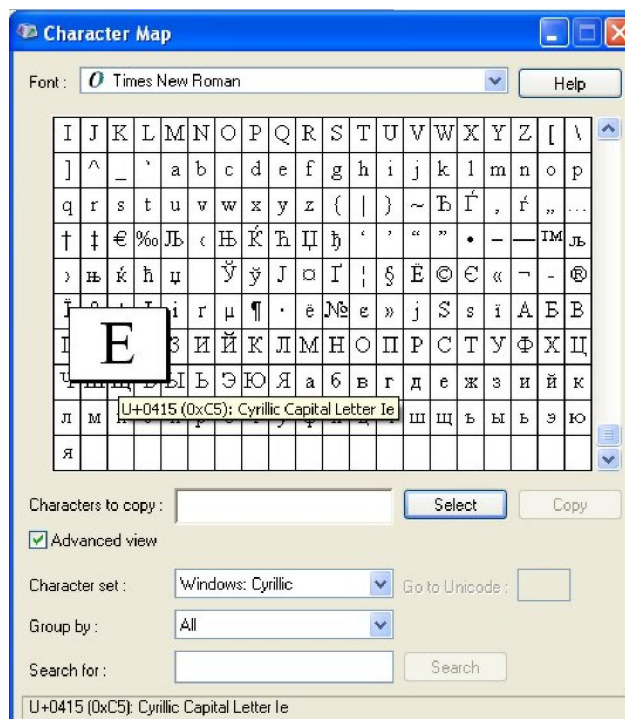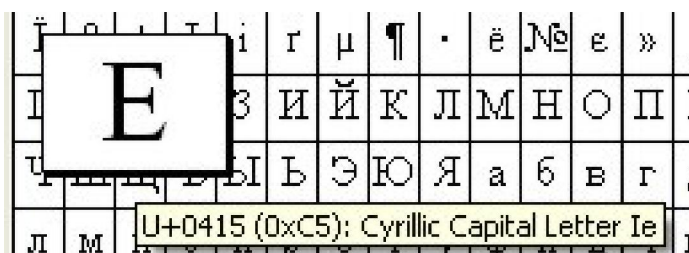

5. **Select font for new symbols** –all new added symbols will appear in selected font, size and style.
6. **Apply all font changes into fullflash file**-apply changes you have made in fullflash
7. **Save edited fullflash file**-save your job.


Add new symbols Tab

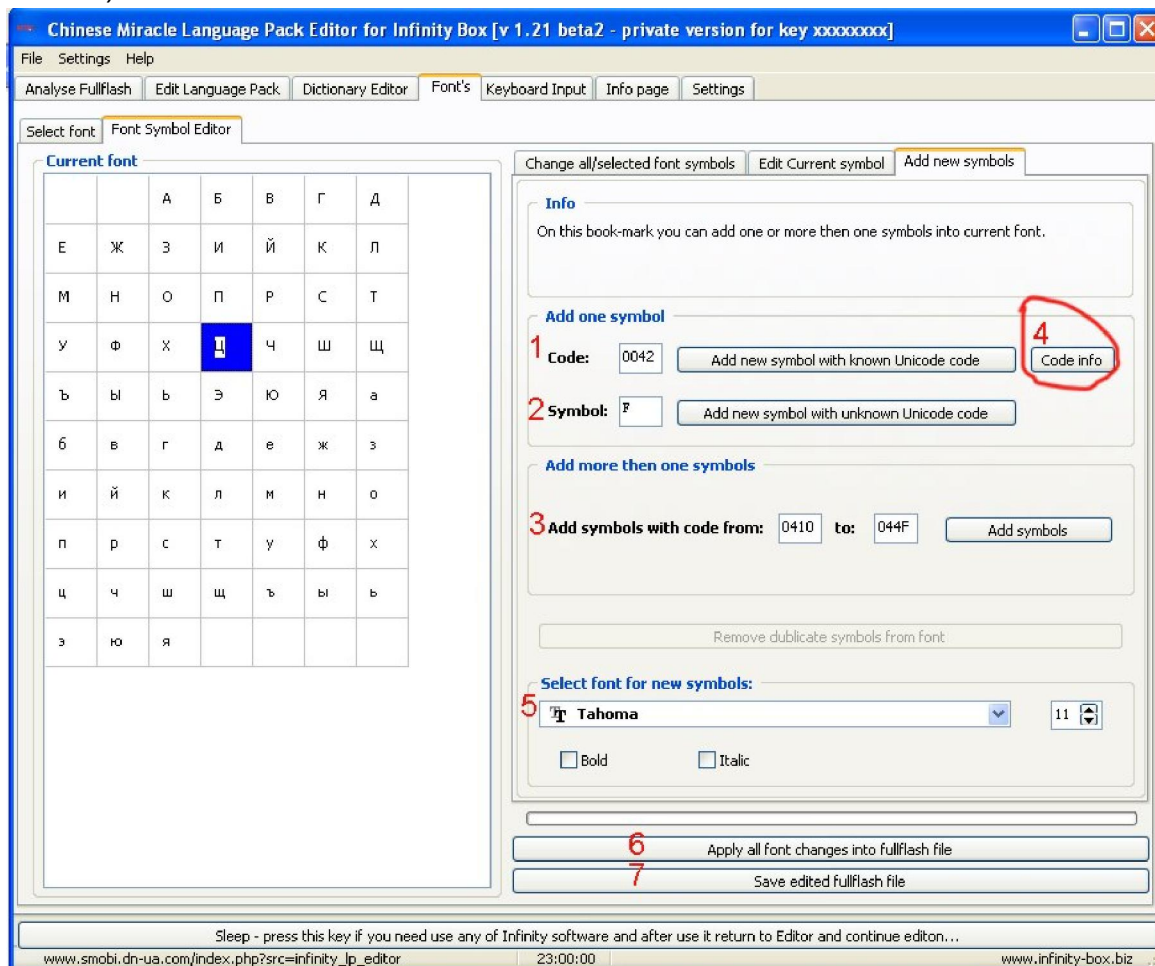

5. Keyboard input –define phones keyboard input characters


With keyboard input tool you can modify and new keyboard input characters. Sample: If by default by pressing phones “2” button you can enter characters abc2ABC-now you can change these characters to ABC2AБВГ or to any characters you like or you can load previously saved keyboard layout base.

- 1) **Firmware keyboard layout**-layouts that are currently loaded in phone, select each of them to see or change
- 2) **Current layout** –detailed look of selected layout. You can modify this layout for saving in base file. **To take effect this modified layout in phone you must save it in base file (press 5)and then reload it in step 4.**
- 3) **New layout**-layout created by yourself. By default this layout is empty. As you see in picture-I have entered characters that I want to appear in my phone for russian language.
- 4) **Layout base**-layout base which are stored in MT62xx_lp_editor_keyb_layouts.ini file. Choose layout from drop-down list that are saved in file. Characters will be automatically filled in *New layout* box.
- 5) **Save current layout into base file** (MT62xx_lp_editor_keyb_layouts.ini)

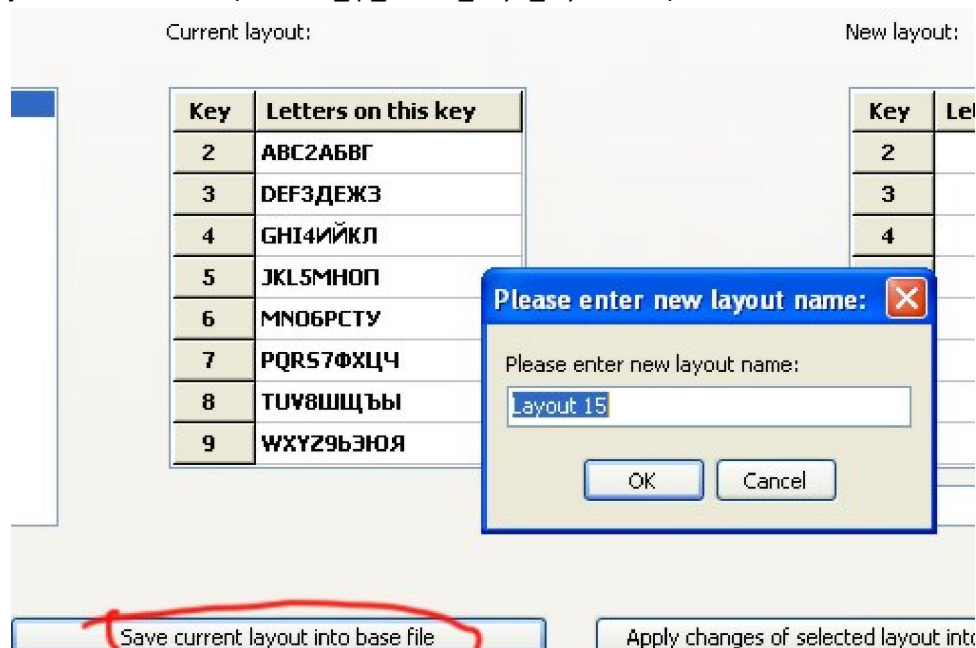

- 6) **Apply changes of selected layout into fullflash file**- press this to apply changes
- 7) **Save edited fullflash file**-save your job.

Keyboard input

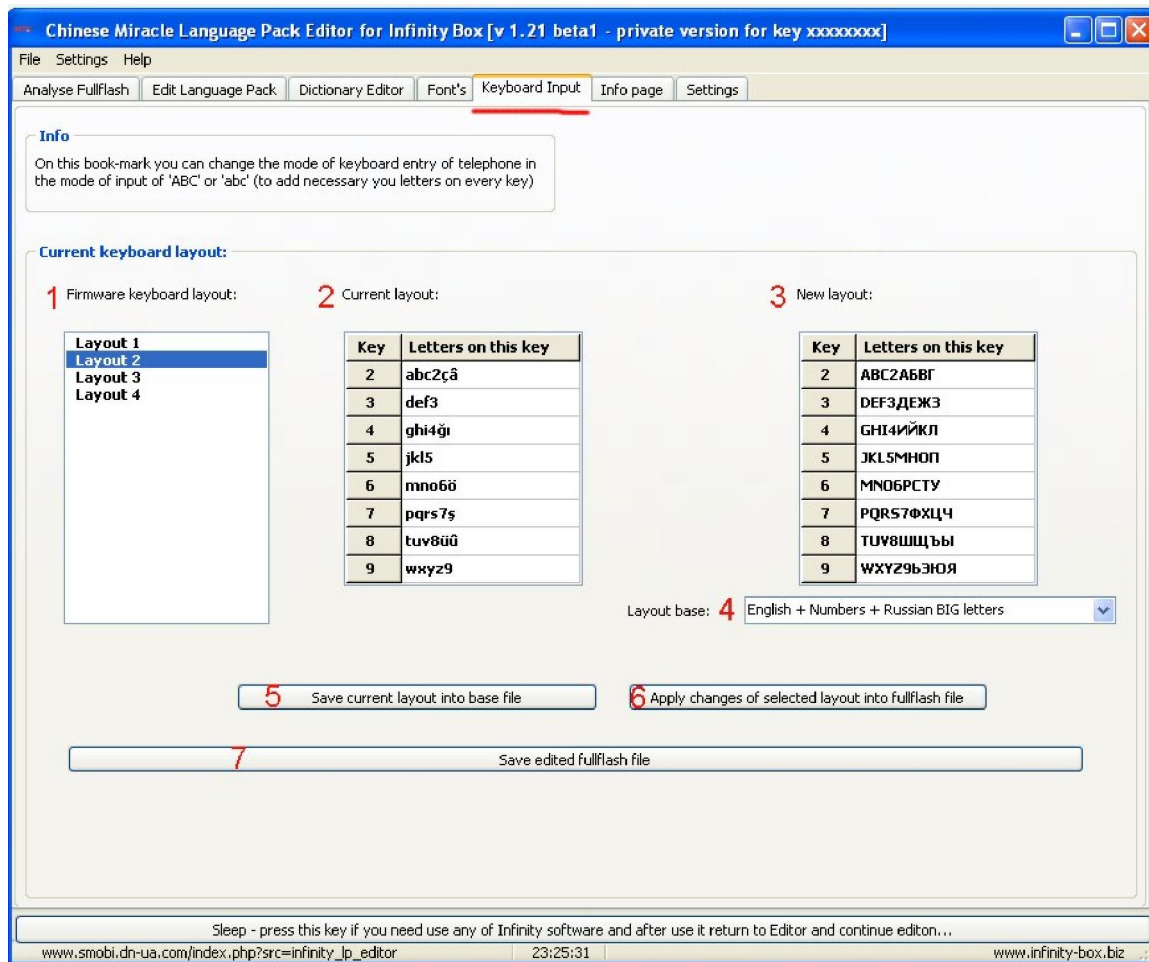

6. Info page

Shows operation process logs, software version changes. Press "show loaded files" to see fullflash you are working on.



7. Settings- main and advanced Language pack editor settings.

Use these settings to tune up software for your specific needs and better performance.

1) Select software interface language

2) Other settings:

Apply "Correct Cyrillic input on keyboard" patch-this is actually only for Russian users of software

Copy hands edited pair into Dictionary editor. If this is checked-manually edited phrases in "Edit language pack" window automatically will be added to "Dictionary editor"

Search picture table- additional "Picture" editor window will appear to search and change pictures in phone's firmware. You can save and change pictures in phone.

Search fonts in firmware-enable Fonts editor window Tab.


Manual select CPU type- leave this unchecked and software will find it automatically.

Use dictionary from Dictionary Editor for "Load Dictionary" button- if checked, currently active dictionary from "Dictionary Editor" will be loaded.

3) **Color settings**-set your own color settings or reset to the software default colors

- 4) Searching settings-if checked, letter registers will be ignored when searching phrases in *Dictionary Editor* or *Language Pack*
- 5) **Load on start dictionary**- set your default dictionary for use in editor
- 6) **Patches**-set default location of Fullflash, Dictionary and Fonts file directory

Settings

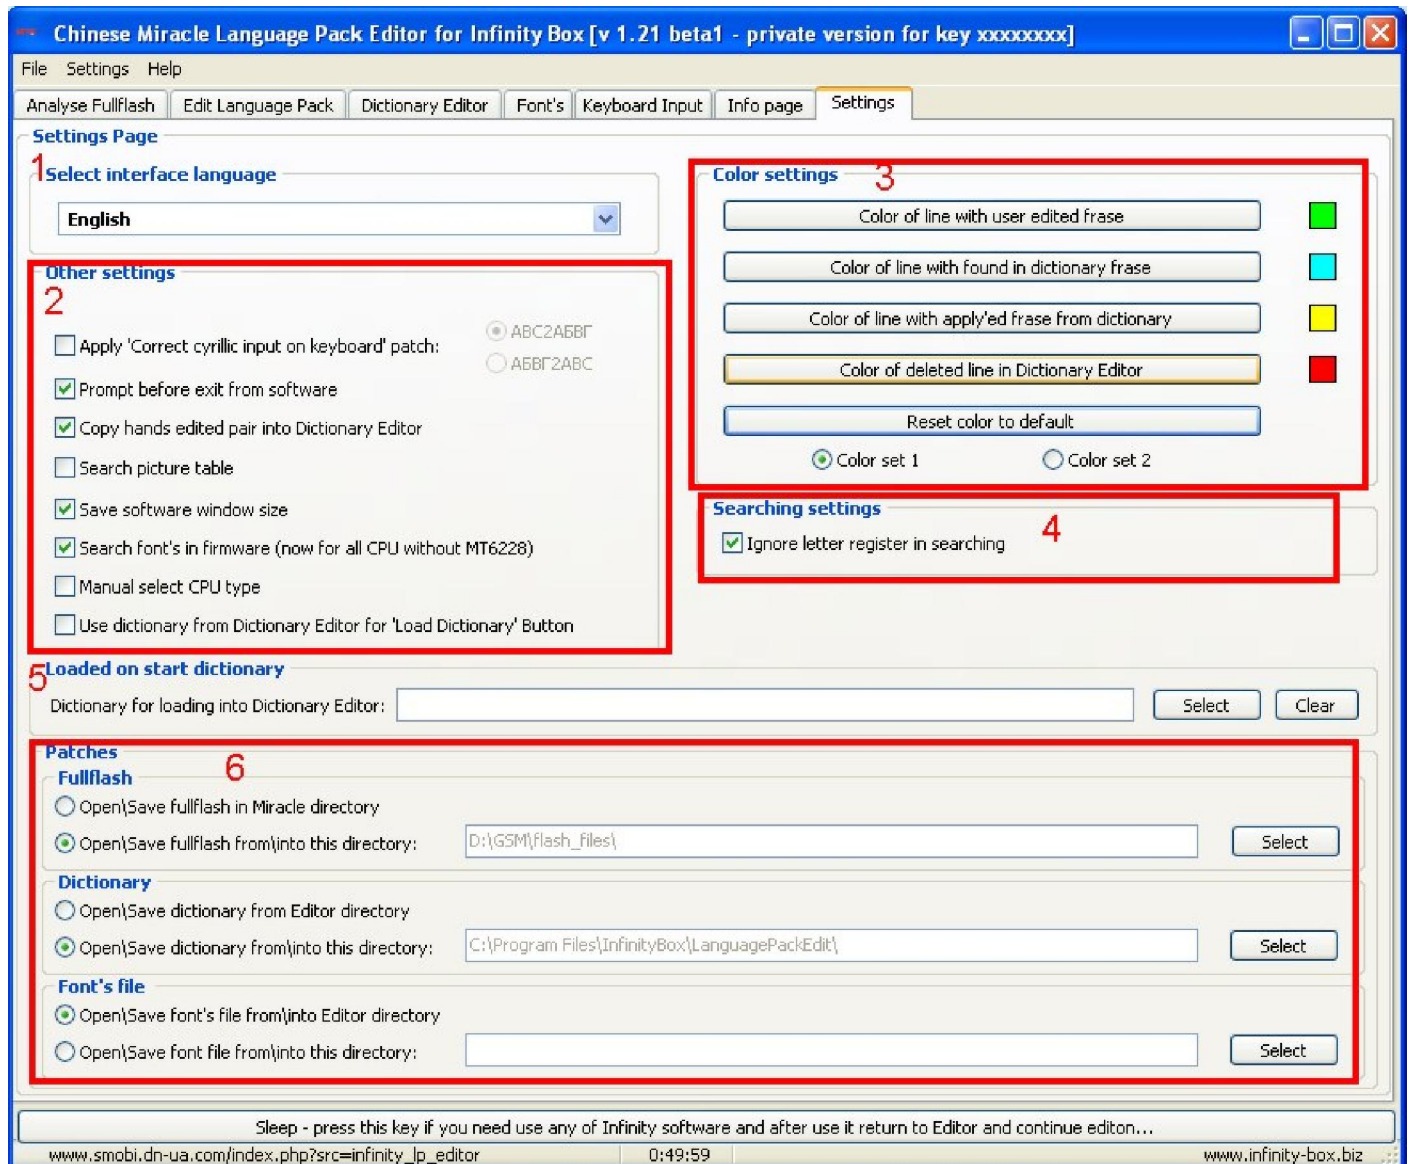

8. Pictures

Use Pictures editor to search, save and change pictures in phones firmware.


Picture list- list of found pictures in firmware.

Save current picture into file-save picture for later use.

Load current picture from file-change currently selected picture to other picture from file.

Save all pictures to file-all pictures in firmware will be saved to specified directory.

Save edited fullflash-apply changes and save your job.

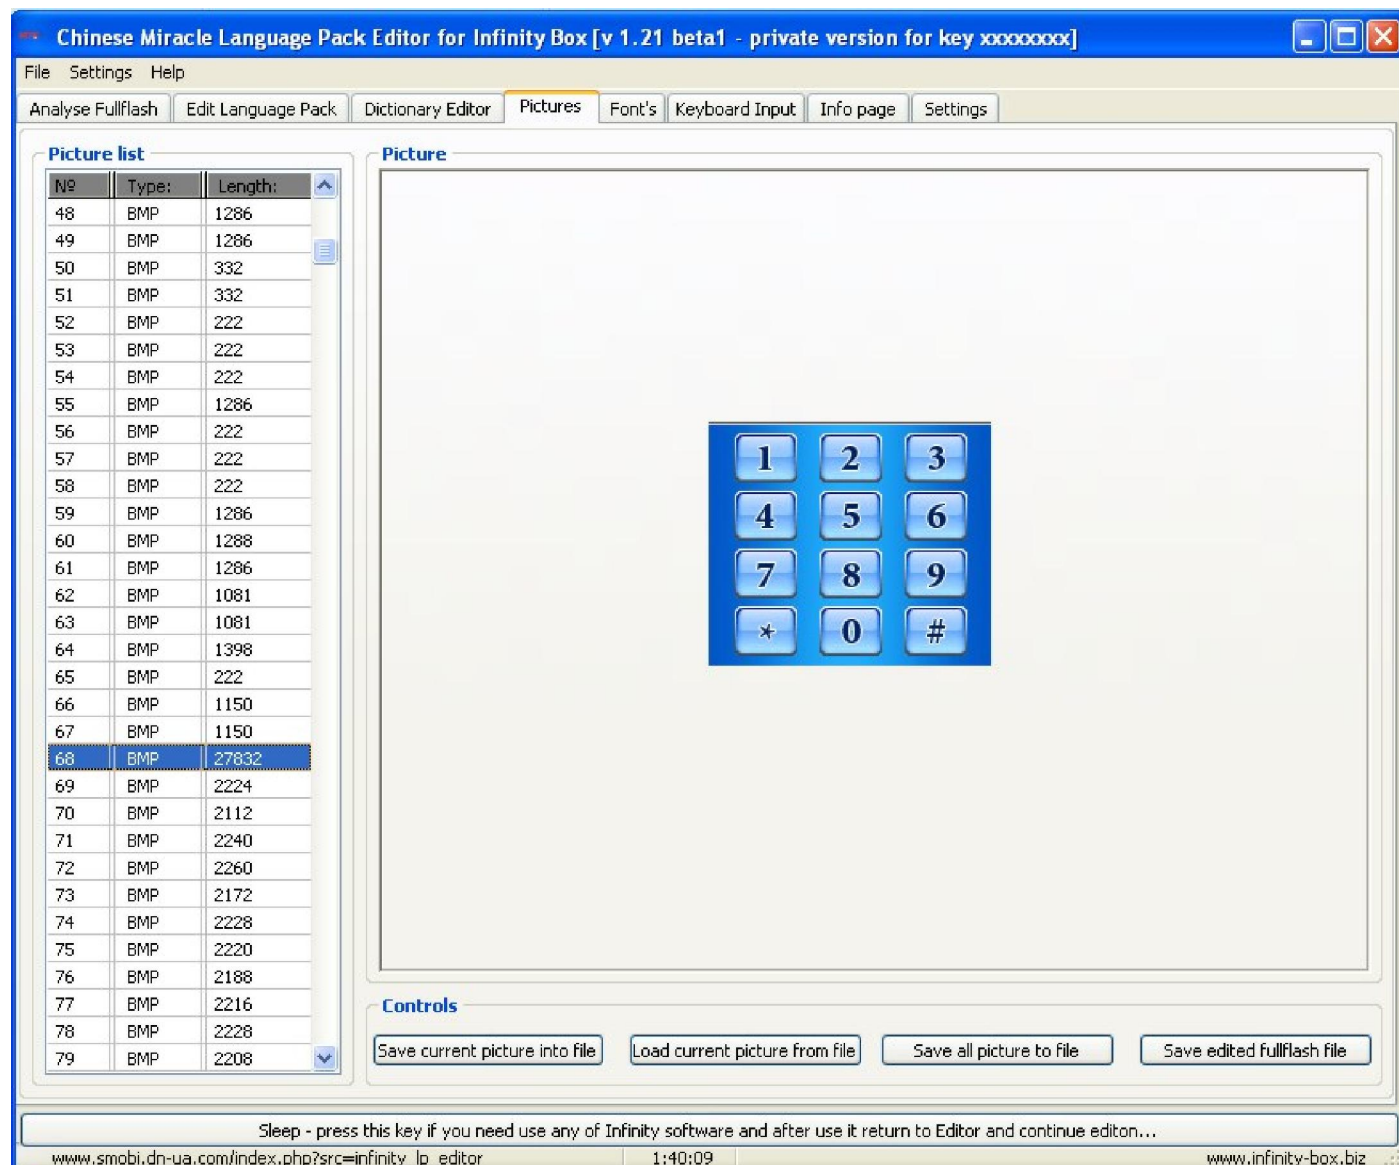

Step by step instructions how to change fonts, change and edit languages in fullflash with samples.

Model used: Chinese Vertu Signature Type RHV-2

Languages in phone before: En Ru Fr De MI Th Vn Ar

Fullflash: [TELSDA26_06B_PCB01_GPRS_MT6226_S01.MAUI_06B_W07_12_MP_1_V54.BIN]

Operations done:

Deleted Chinese font

Added fonts for Portuguese, Italian, Turkish languages

Added new font for Russian language

Changed keyboard layout 1 for Russian language characters

Arab language changed to Portuguese and language code changed to "0351" for correct input left to right

Thai language changed to Italian


Vietnamese changed to Turkish

Russian language edited and corrected


Result:


before			after		
Available language pack's			Available language pack's		
1	English	*#0044#	1	English	*#0044#
2	Français	*#0033#	2	Français	*#0033#
3	Deutsch	*#0049#	3	Deutsch	*#0049#
4	Bahasa Melayu	*#0060#	4	Bahasa Melayu	*#0060#
5	Tiếng Việt	*#0084#	5	Turkey	*#0084#
6	Русский язык	*#0007#	6	Русский язык	*#0007#
7	العربية	*#0966#	7	Portuguese	*#0966#
8	ไทย	*#0066#	8	Italiano	*#0066#

Phone screenshot before:

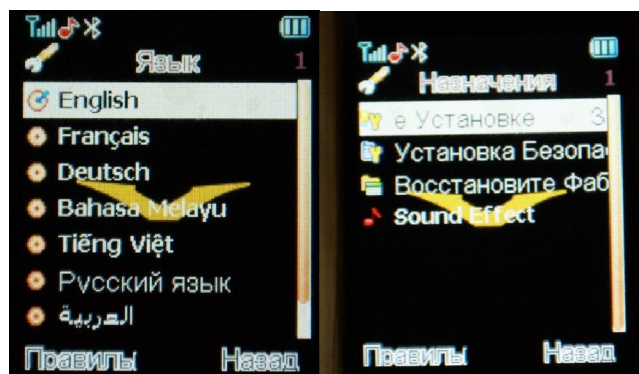

Phone screenshot after:

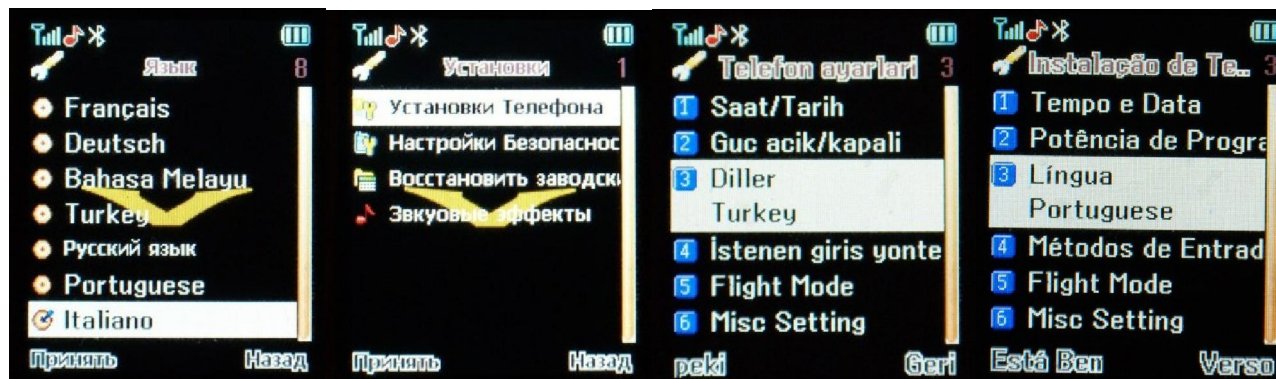

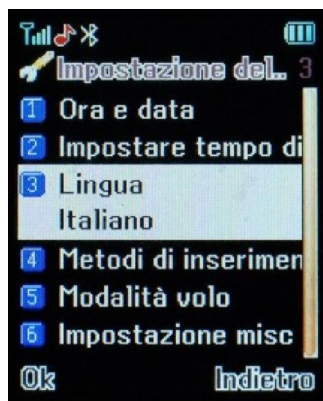


!!!Before you start it is very important to make operations with fonts first and only after it has done continue your work with nagueage pack operations!!!

Lets start!

PART 1-working with fonts.

1.Analyze fullflash

Open fullflash by selcting it and take decision what you want to do. In my case I will edit bad russian language to correct russian,and add portuguese, italian and turkish languages instead of arab,vietnamese and thai. Also I will add previously saved international fonts from other phonefor portugease, italian and turkish languages and will add a new fresh font for russian language using region codes.

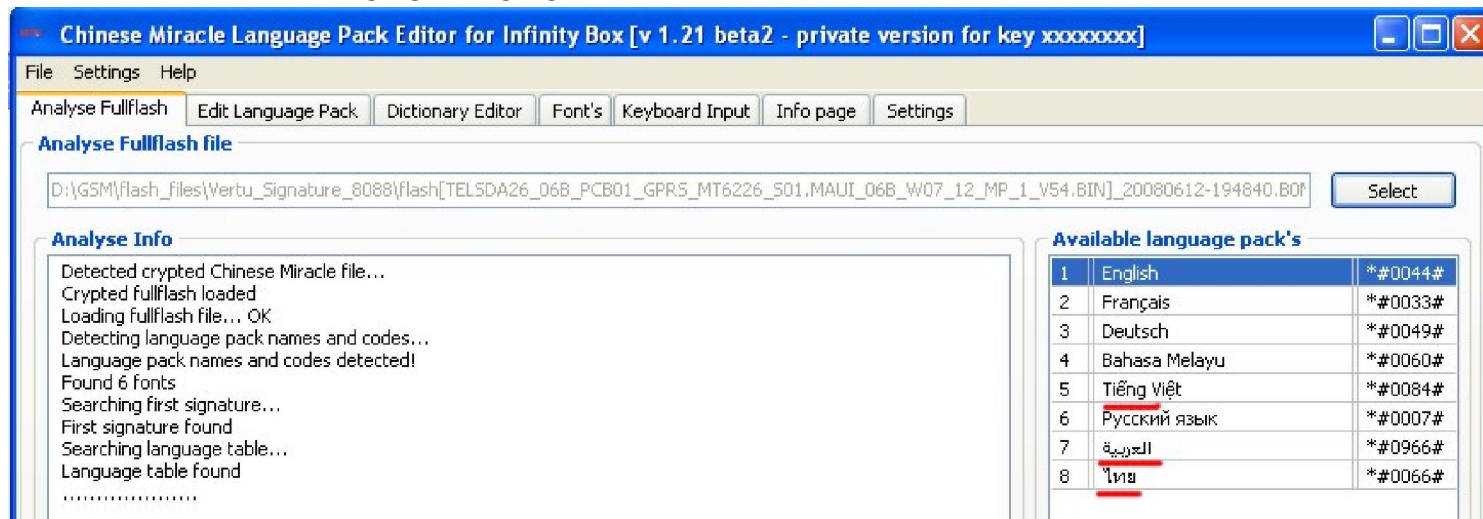

2.Go to Fonts and see what is inside in each font by selecting and double clicking the font.

In Font 2 there are only chinese characters-we do not need them for our languages.

In Font 4 and Font 5 there are poor international characters and bad russian characters. So we will delete all these fonts and add a fresh new font. See pictures below.

Bad russian characters between the poor international characters.


Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў
Ў	Ў	Ў	Ў	Ў	Ў	Ў

3. Deleting the fonts.

There are 2 methods we will use for deleting the fonts. 1st method- delete fonts by selecting and deleting whole font from the list, and the 2nd method-deleting the font inside “Font symbol editor” by selecting and deleting the characters.

Font 2 we will delete completely: Select Font 2 and press “Delete selected font”, then press “apply changes to fullflash”


Go to Font 4 by selecting and double clicking the font.

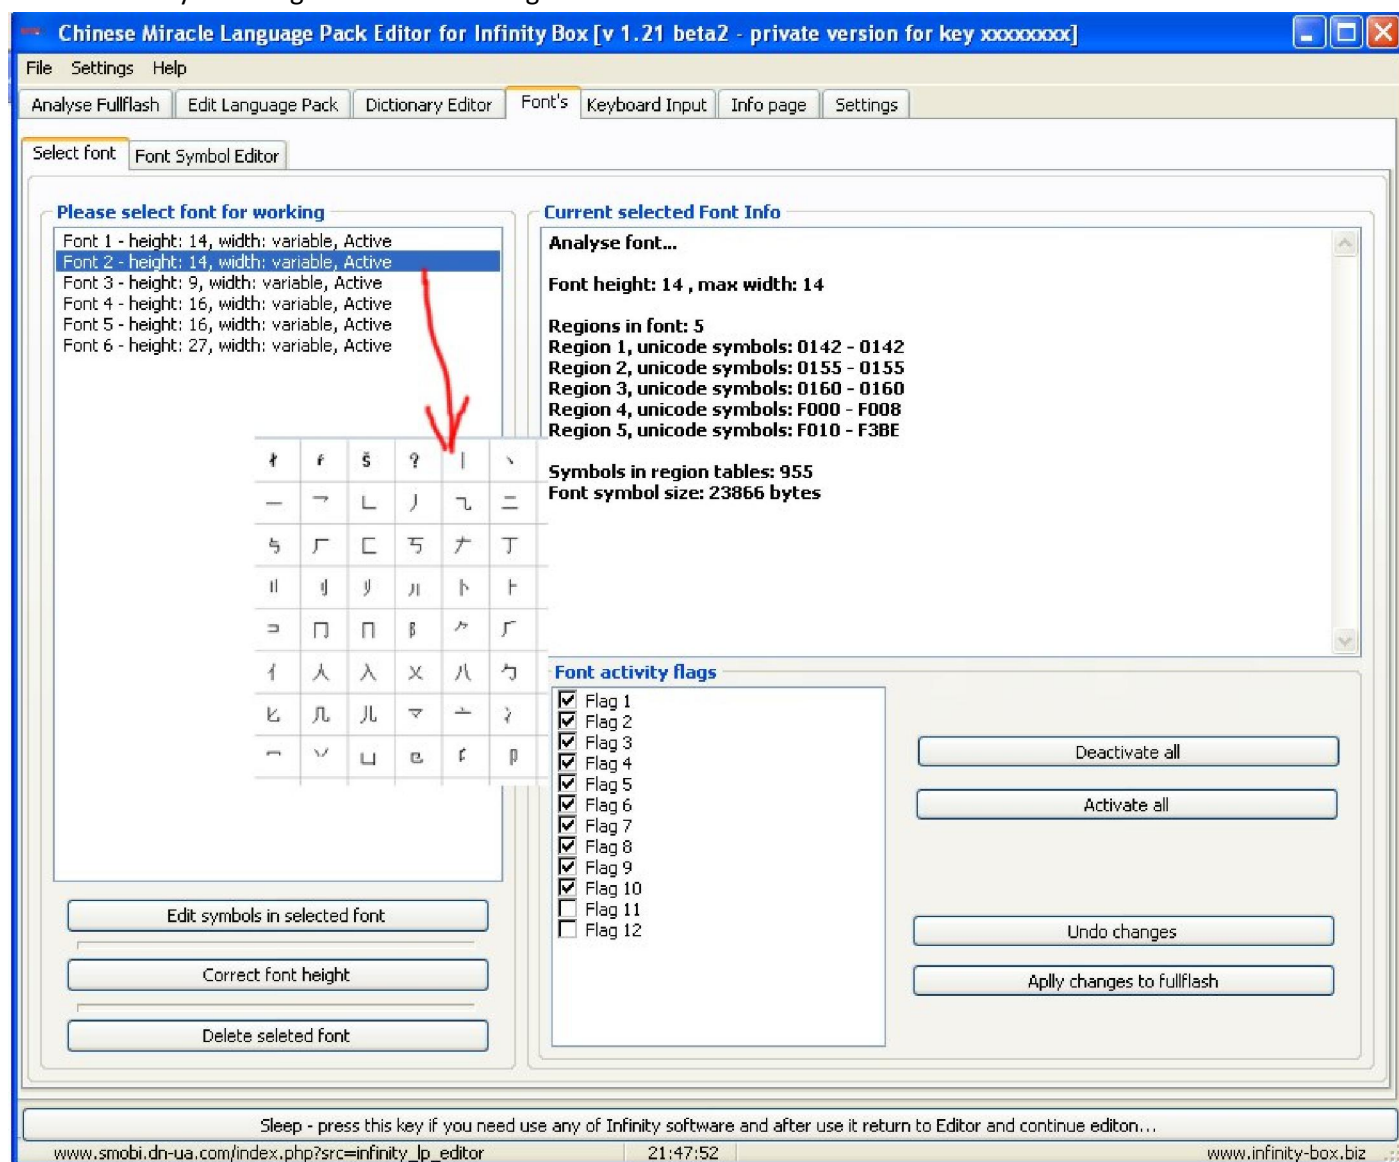


Now you are in **Font symbol editor** window and under **Change all/selected font symbols** Tab.

Select all the symbols with right mouse click menu “Set begin of selection” and “Set end of selection”. Press “Delete selected symbols”.

Press “Apply all font changes in fullflash” to take effect.

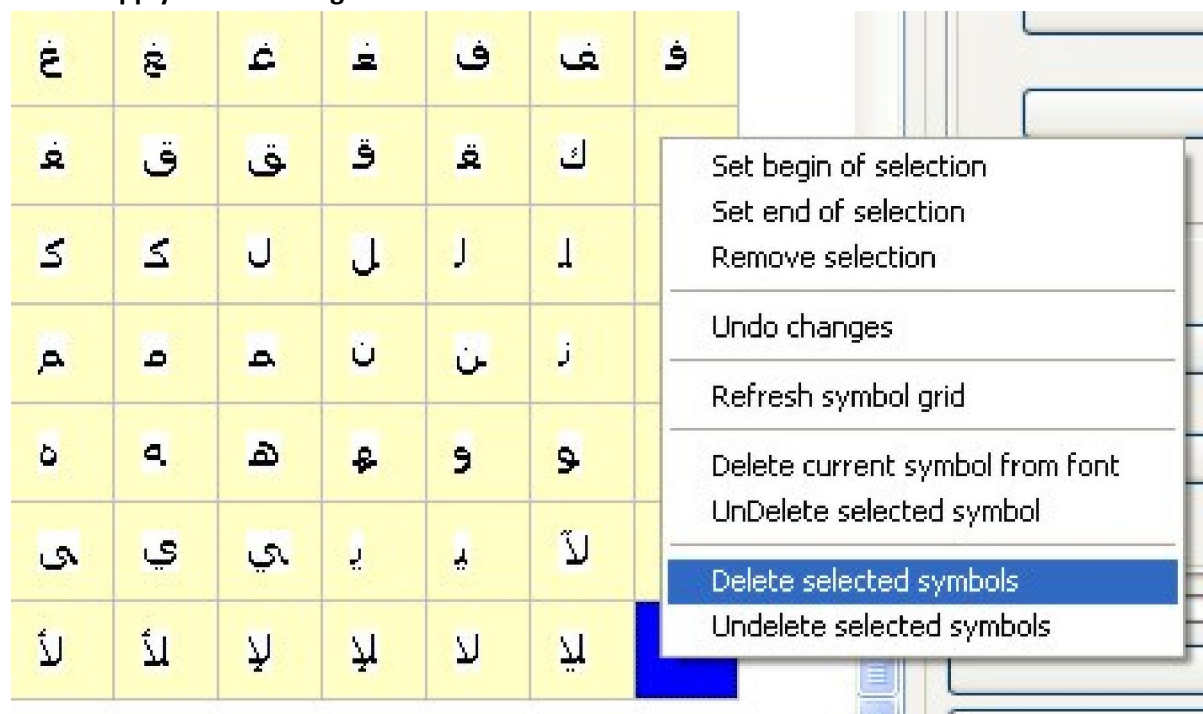

Font characters table now is empty

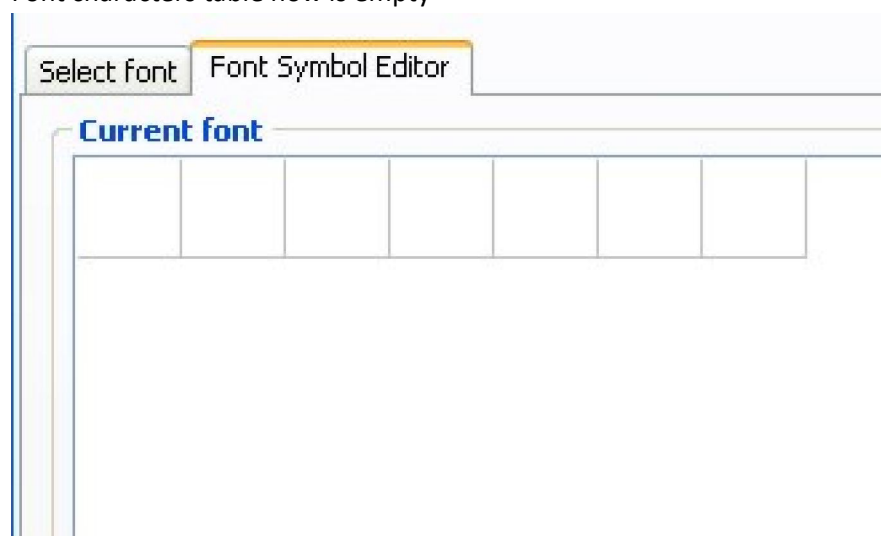


4. Add previously saved good international fonts from other phones firmware. In my situation I have saved font from Anycool T808 dual sim TV phone . Press “load font from file” and choose “font_height_16_Anycool_T808_international.ch_font” . Default location of saved fonts is C:\Program Files\InfinityBox\LanguagePackEdit\font .

Y
.

Save font into file


Load font from file

Now a good font are loaded and press again “apply all font changes to fullflash”.

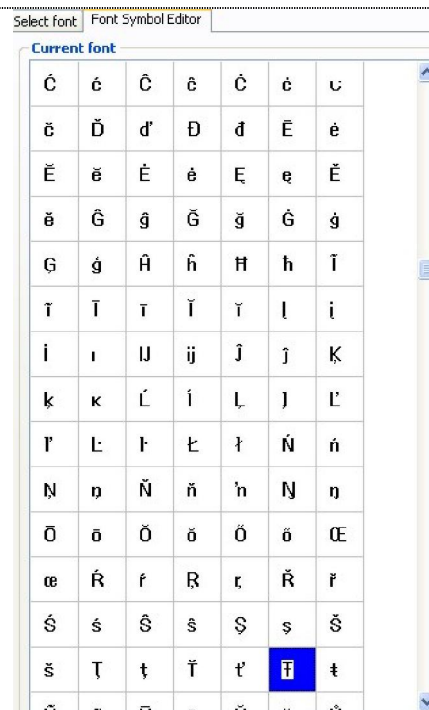

So far is ok, but we need a russian language characters. Russian language letters we will add by using symbols region codes.

5. Go to Tab “Add new symbols” and press “Code info” to open Character map. Select font style you like and chose

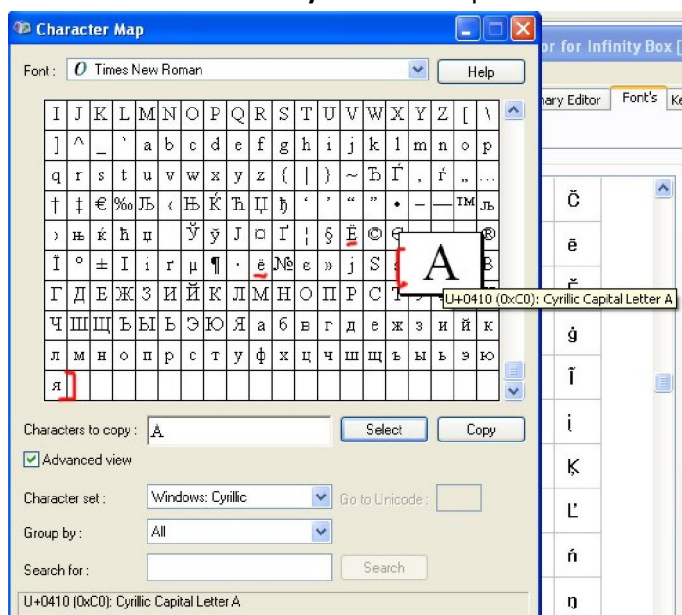

Windows: Cyrillic in Character set. Click or point mouse over desired character and you will see the character unicode code. For russian language we need characters from “А” to “Я”, “Ё” and “ё”.

So you will need codes 0410 to 044F, 0401 and 0451. Go to “add more than one symbols and fill in values from: 0410 and to: 044F, press “Add symbols”. See picture below.

Add more than one symbols

Add symbols with code from: to:

Now we will add characters “Ё” and “ё” by adding one symbol separately.

Ё	ё
U+0401 (0xA8): Cyrillic Capital Letter Io	U+0451 (0xB8): Cyrillic Small Letter Io

Go to “Add one symbol” and fill in value Code:0401 and press “Add one symbol with known Unicode code”
Repeat this operation again with code 0451.

Add one symbol

Code:

Symbol:

Add one symbol

Code:


Symbol:



Good, we have added Russian language characters to phone. Russian letters we can see in table somewhere inside all other international characters we added in previous steps. See picture. We have created a multiinternational characters font .

Press “Apply all font changes into fullflash file” to take effect.

It is worth to save this new international multi use font in file for later use in this fullflash and all other phones. Press “Save font into file” and save as (or as you want) font_height_16_T808_inter+rus_modif.ch_font

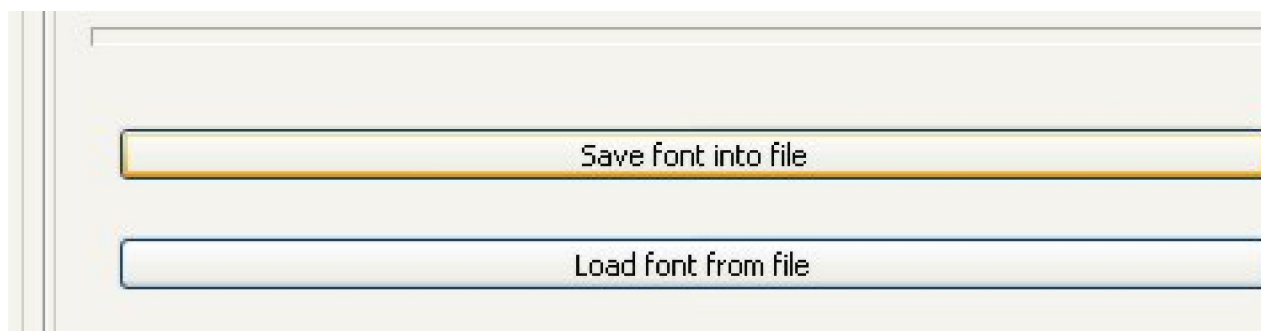


NOTES: You can also select style and size for new symbols using “**Select font for new symbols**” .Select necessary values before pressing “Add symbols” or you can change style and size by selecting characters in “**Change all/selected font symbols**” TAB in **Font Symbol Editor**.

6. Font 4 now is ok, but we also need to modify and change Font5 in phone.


Go back to “Select Font” and select Font5 and press **Delete selected font**. Take attention to fonts activity flags-flags 5 and 6 were enabled before deleting, you will need to enable back them later. Font5 now is deleted and empty.



Double click the Font 5 and press “Load font from file”, select “font_height_16_T808_inter+rus_modif.ch_font” (this is our good international font we created and saved in step 5. Press “Apply all font changes in fullflash file” .

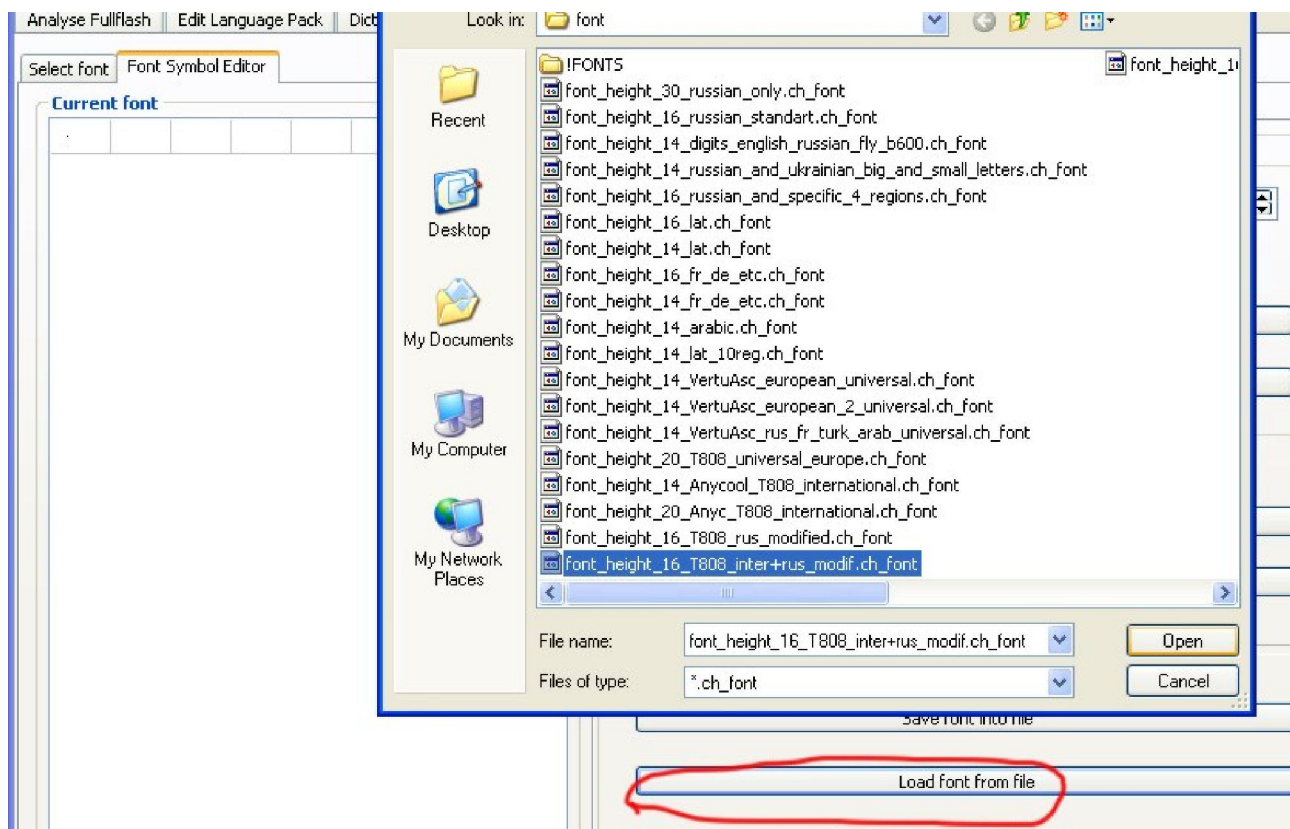


Go back to “Select Font” TAB, enable Flag5 and Flag6 and press “Apply changes to fullflash”

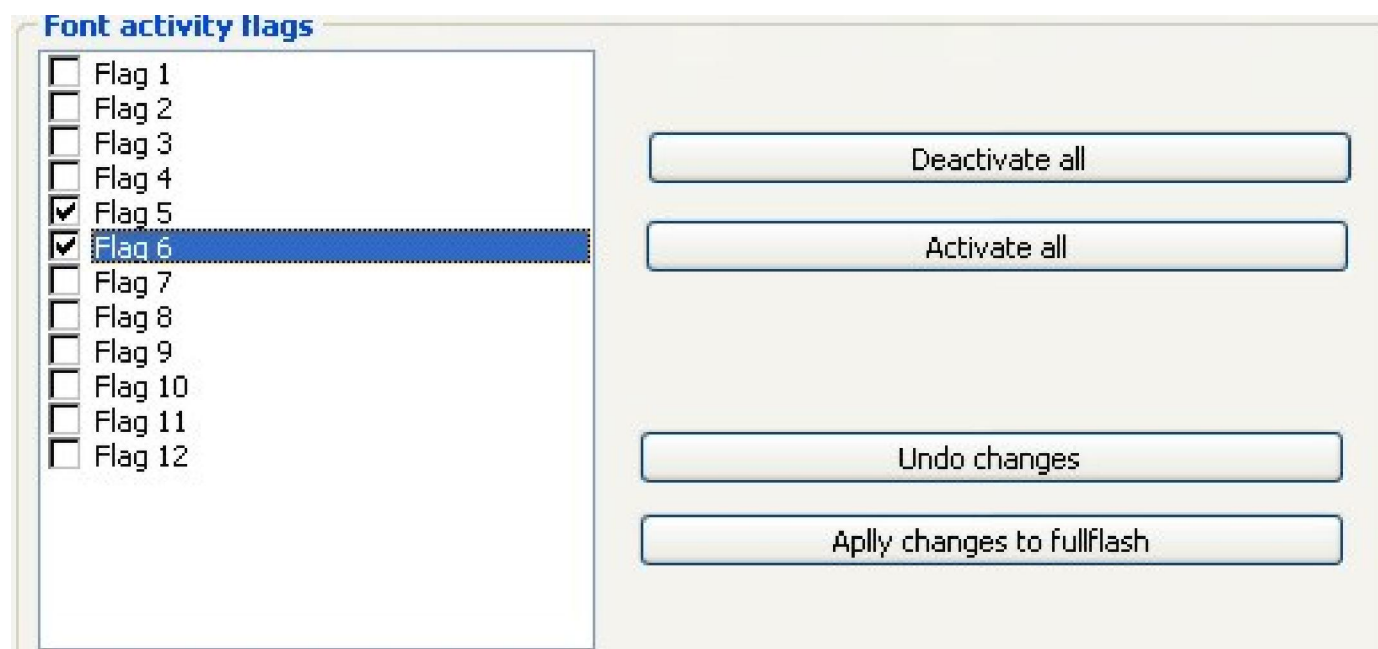


Important!! Part1 and main-working with fonts is finished-go to “Font symbol editor” TAB and press “Save edited fullflash”. Save this fonts edited fullflash for any case so you have backup if you get in troubles later.

PART 2-CHANGING KEYBOARD LAYOUT 1 FOR RUSSIAN LANGUAGE

Go to “Keyboard input TAB select Layout1 in the list under Firmware keyboard layout. Select layout base and choose English+Numbers+Russian small letters in the drop-down list (or choose whatever saved layout you want. I will select current one for Russian language.

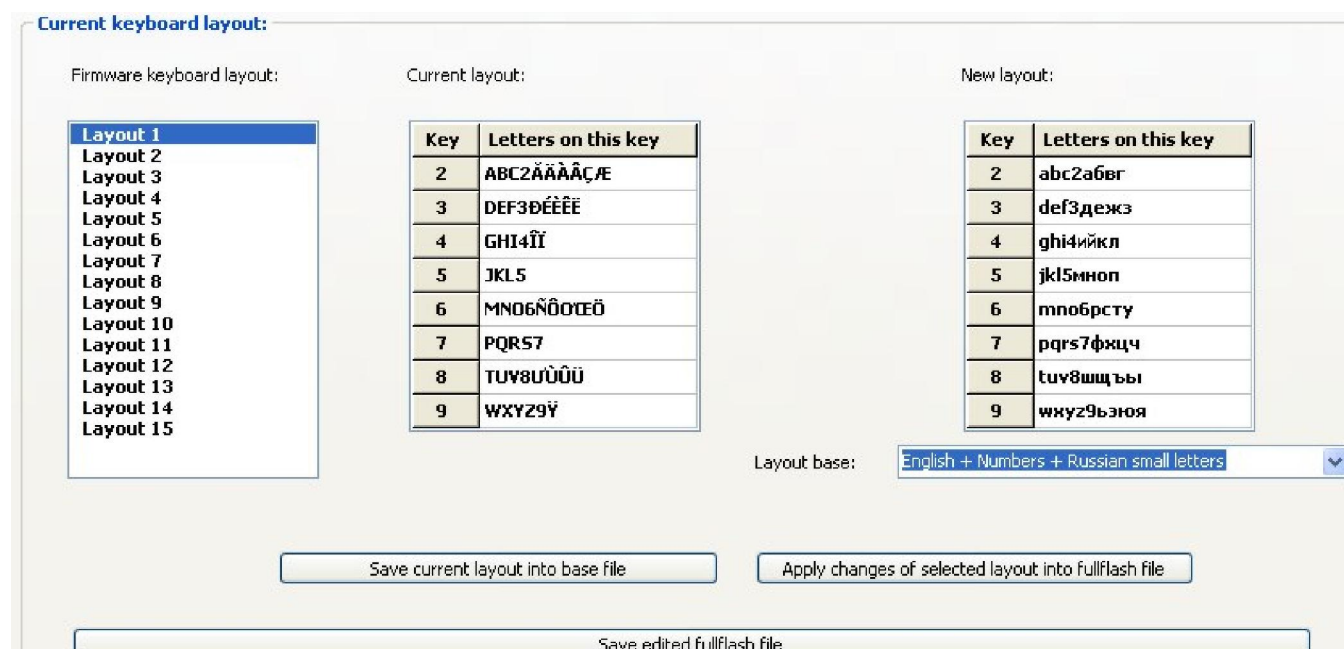

Press **Apply changes of selected layout into fullflash file**. See result- layout has changed for Russian language.

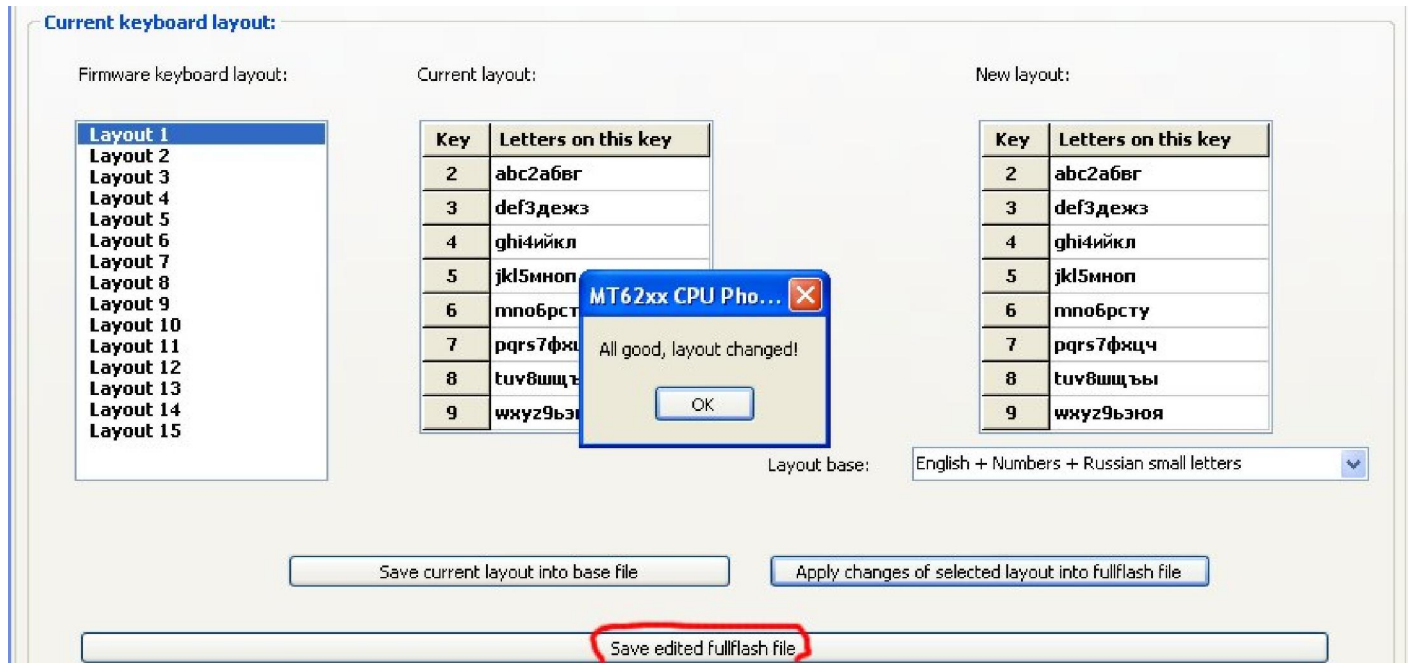


Layout 1,2,3,4 etc is order in which layouts appear in phone by switching them. So You can change layout 1,2,3,4,etc to Portuguese, Turkish or Italian language use in which order you like. In this case I did not change layouts for other languages because I do not know characters and character order for them. So change them yourself by typing in your characters in **New layout** or load your previously saved layout for your desired language.

Press Save edited fullflash file to save your job and go to PART 3.

PART 3-EDITING LANGUAGE PACKS

1. Changing the selected language pack to other.

Go to **Analyze fullflash** window. Select Arab language (7) and press Change **selected language pack to other**.

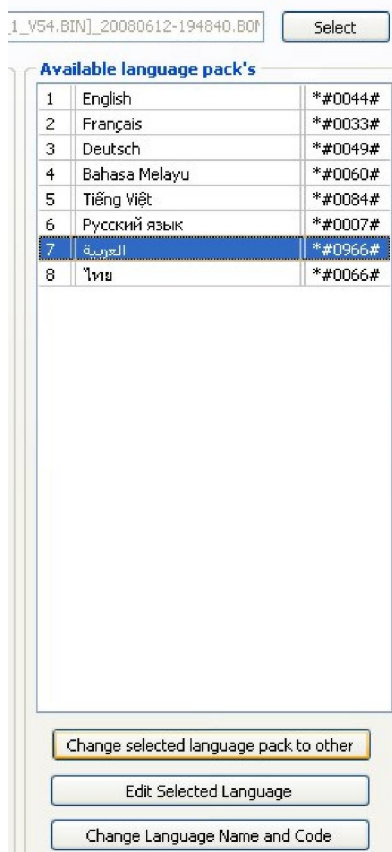


In this step we will change Arab language to Portuguese language. Press Load and choose "Portuguese_Anycool_T808.dict" language dictionary from C:\Program Files\InfinityBox\LanguagePackEdit\Dictionary_other folder.




After dictionary is loaded press "Apply" to take it effect. Press Save edited to save fullflush file.



Opening the Portuguese dictionary

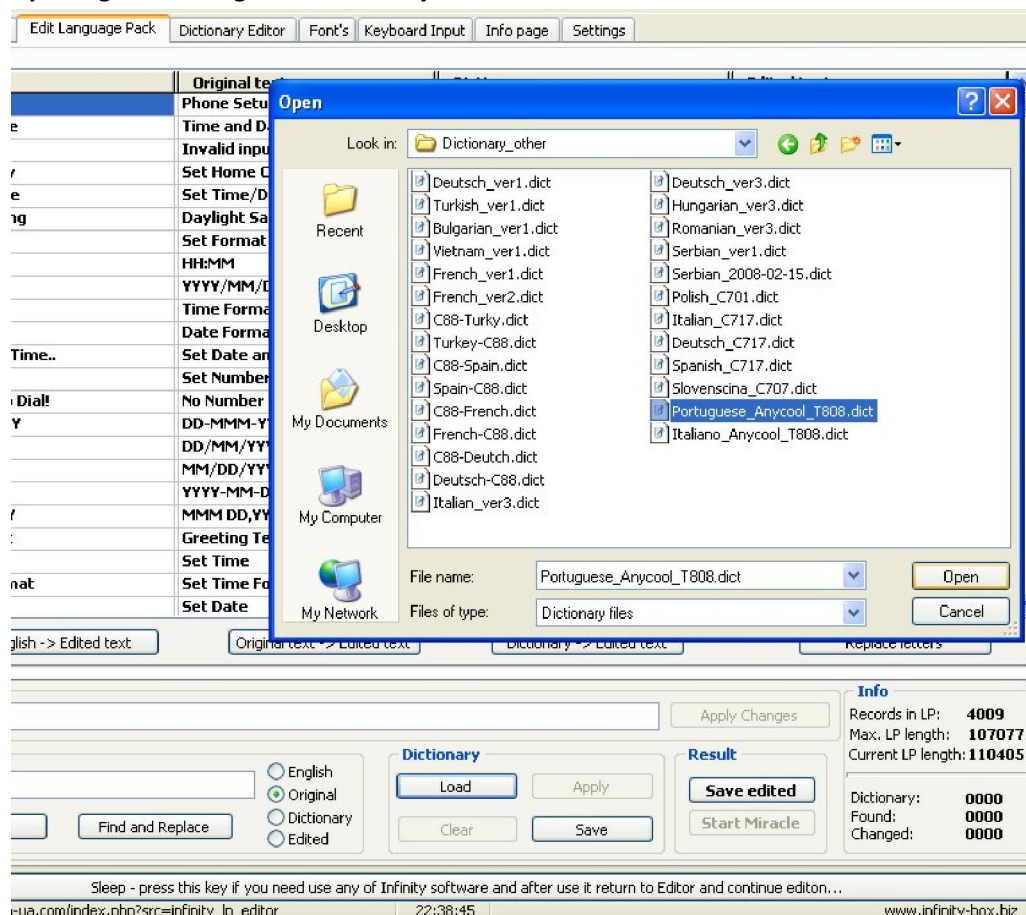

Saving edited fullflash file

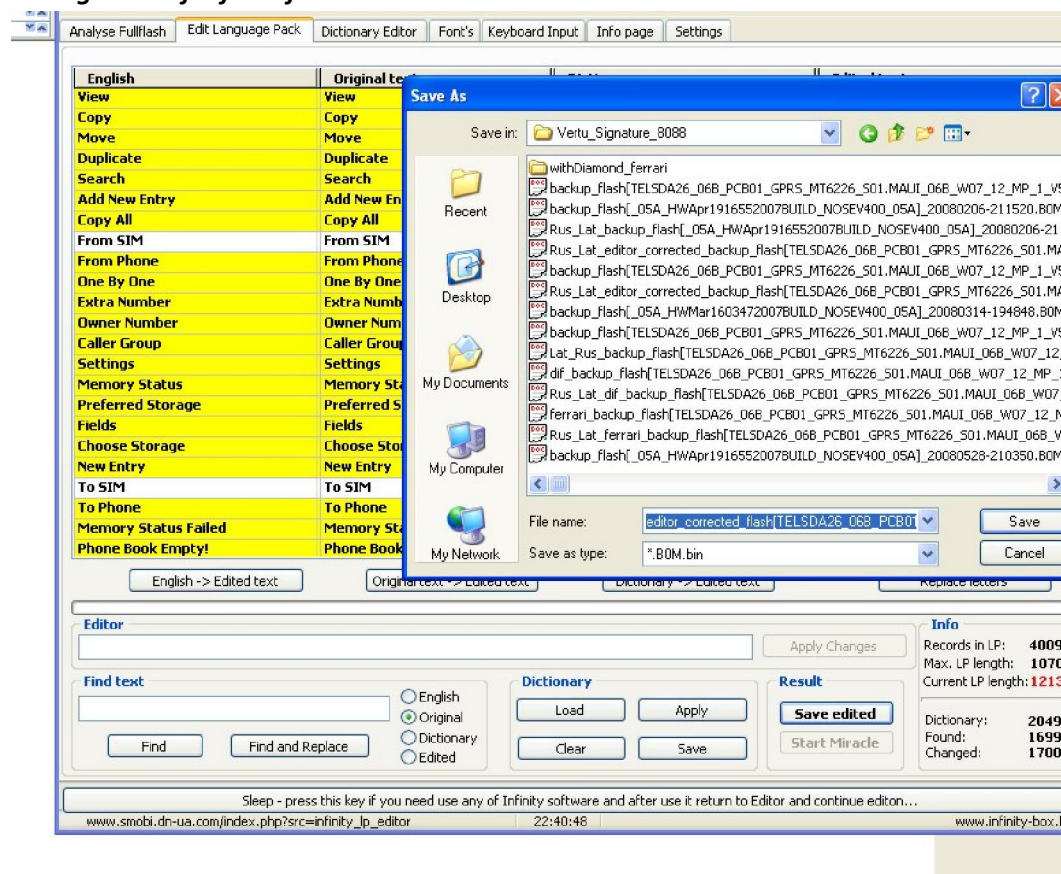

After pressing “Save” program will ask you for language description and language code in flash. Write “Portuguese” instead of Arab language and write code “*#0351#” instead of code “*#0966#”. Press “OK”.



We have successfully changed Arab language to Portuguese.

Repeat the same steps to change Thai language to Italian and Vietnamese to Turkish.

2. Edit selected language pack to other.

Available language pack's

1	English	*#0044#
2	Français	*#0033#
3	Deutsch	*#0049#
4	Bahasa Melayu	*#0060#
5	Turkey	*#0084#
6	Русский язык	*#0007#
7	Portuguese	*#0966#
8	Italiano	*#0066#

Change selected language pack to other

Edit Selected Language

Change Language Name and Code

As we can see in phones menu –Russian language by default comes with lot of errors and mistakes. We need correct this.

Go to Analyze fullflash and select Russian language (6).Press “Edit selected language.

Pres **Load** dictionary and open from C:\Program Files\InfinityBox\LanguagePackEdit\Dictionary_Ru_Ua_Kz File “Russian_big_dictionary.dict” .Press Apply, then press “Save edited”.

Chinese Miracle Language Pack Editor for Infinity Box [v 1.21 beta2 - private version for key xxxxxxxx]

File Settings Help

Analyse Fullflash Edit Language Pack Dictionary Editor Font's Keyboard Input Info page Settings

English	Original text	Dictionary	Edited text
Language Setup	Звоните Установке	Установки Телефона	Установки Телефона
Time and Date	Время и Дата	Время и Дата	Время и Дата
Invalid input	Недействительный ввод	Неправильный ввод	Неправильный ввод
Set Home City	Набор Домашний Город	Установить Родной Город	Установить Родной Город
Set Time/Date	Время / дата Набора	Установить Время-Дату	Установить Время-Дату
Set Format	Формат Набора	Установить Формат	Установить Формат
HH:MM	Час:Мин	Час:Мин	Час:Мин
YYYY/MM/DD	Год/Месяц/День	Год/Месяц/День	Год/Месяц/День
Time Format:	Формат Времени	Формат Времени	Формат Времени
Date Format:	Формат Даты	Формат Даты	Формат Даты
Set Date and Time..	Дата Набора и Времени ..	Установить Дату и Времени	Установить Дату и Времени
Set Number	Установить Номер Набора	Установить Номер	Установить Номер
No Number To Dial!	*Никакой Номер, чтобы Набрать	Нет номера для набора!	Нет номера для набора!
DD-MM-YYYY	День-Месяц-Год	День-Месяц-Год	День-Месяц-Год
DD/MM/YYYY	День/Месяц/Год	День/Месяц/Год	День/Месяц/Год
MM/DD/YYYY	Месяц/День/Год	Месяц/День/Год	Месяц/День/Год
YYYY-MM-DD	Год-Месяц-День	Год-Месяц-День	Год-Месяц-День
MMM DD,YYYY	Месяц День,Год	Месяц День,Год	Месяц День,Год
Greeting Text	Приветствие Текста	Приветствие	Приветствие
Set Time	Набор время	Установить Время	Установить Время
Set Time Format	Набор Формат Времени	Установить Формат Времени	Установить Формат Времени
Set Date	Дата Набора	Установить Дату	Установить Дату
Set Date Format	Формат Даты Набора	Установить Формат Даты	Установить Формат Даты

English -> Edited text Original text -> Edited text Dictionary -> Edited text Replace letters

Editor

Find text

Find

Find and Replace

Dictionary

Load

Apply

Clear

Save

Result

Save edited

Start Miracle

Info

Records in LP: 4103

Max. LP length: 135300

Current LP length: 126976

Dictionary: 3068

Found: 347

Changed: 348

Sleep - press this key if you need use any of Infinity software and after use it return to Editor and continue edition...

www.smbi.dn-ua.com/index.php?src=infinity_lp_editor 22:50:53 www.infinity-box.biz

Now Russian language is corrected and good for use in phone.

FINISH.

You can use Chinese Miracle program to flash your phone with edited fullflush and see successful result of your job.

GOOD LUCK!